

Technical Data Sheet Mini Top View LEDs

65-21/R6C-FS1T1B/2T

Features

- White SMT package.
- Optical indicator.
- Wide viewing angle.
- Soldering methods: IR reflow soldering
- Available on tape and reel
- Pb-free
- The product itself will remain within RoHS compliant version.



Descriptions

The 65-21 series is available in soft orange, green, blue, and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. Besides, LED is mounted top down and emits through the PCB. This feature makes the LED ideal for light pipe application.

Applications

- Optical indicators.
- Coupling into light guides.
- Backlighting (LCD, cellular phones, switches, keys, displays, illuminated advertising, general lighting).
- Coupling into light guides; Interior automotive lighting (e.g. dashboard backlighting, etc.).

Device Selection Guide


Chip	Emitted Colon	Dogin Colon		
Material	Emitted Color	Resin Color		
AlGaInP	Brilliant Red	Water Clear		

Rev. 1 Page: 1 of 10 Everlight Electronics Co., Ltd. http://www.everlight.com Device No.: DSE-651-258

Prepared date: 04-Dec-2006 Prepared by: Josh Chou

65-21/R6C-FS1T1B/2T

Package Outline Dimensions

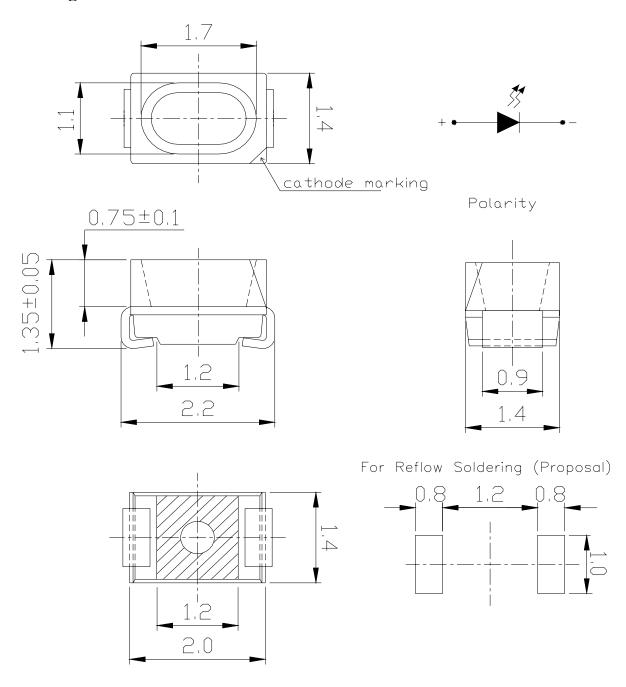

Notes: All dimensions are in millimeters.

Tolerances unspecified are ±0.1mm.

Everlight Electronics Co., Ltd.

Device No.: DSE-651-258

http://www.everlight.com

Prepared date: 04-Dec-2006

Rev. 1

Page: 2 of 10

Prepared by: Josh Chou



65-21/R6C-FS1T1B/2T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge (HBM)	ESD	2000	V
Operating Temperature	Topr	- 40 ∼ +85	$^{\circ}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!$
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	180		360	mcd		
Viewing Angle	2 \theta 1/2		120		deg		
Peak Wavelength	λр		632		nm		
Dominant Wavelength	λd	621		631	nm	I _F =20mA	
Spectrum Radiation Bandwidth	Δλ		20		nm		
Forward Voltage	VF	1.75		2.35	V		
Reverse Current	Ir			10	μ A	$V_R=5V$	

Notes:

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10

^{*}The luminous intensity data did not including ±10% testing tolerance.

^{*}Tolerance of forward voltage ±0.1V.

^{*}Tolerance of dominant wavelength ±1nm.



65-21/R6C-FS1T1B/2T

Bin Range of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
F	FF1	621	626		I 20 A
	FF2	626	631	nm	$I_F=20mA$

Bin Range of Luminous Intensity

Bin	Min	Max	Unit	Condition
S1	180	225		
S2	225	285	mcd	I _F =20mA
T1	285	360		

Bin Range of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
В	0	1.75	1.95		
	1	1.95	2.15	V	I _F =20mA
	2	2.15	2.35		

Notes:

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 10


^{*}The luminous intensity data did not including ±10% testing tolerance.


^{*}Tolerance of forward voltage ±0.1V.


^{*}Tolerance of dominant wavelength ±1nm.


65-21/R6C-FS1T1B/2T


Typical Electro-Optical Characteristics Curves

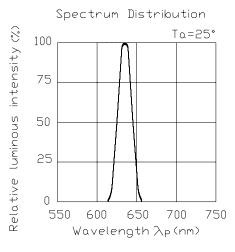






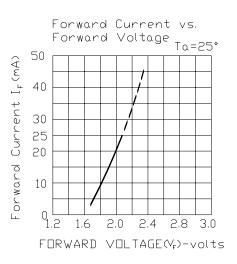








65-21/R6C-FS1T1B/2T

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank

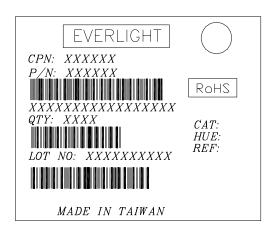

Reel Dimensions

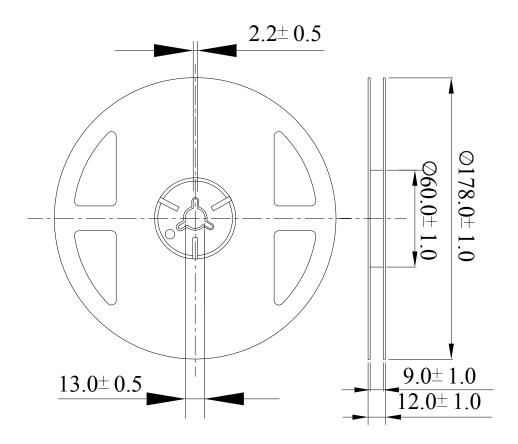

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.: DSE-651-258

http://www.everlight.com

Rev. 1

Page: 6 of 10


Prepared date: 04-Dec-2006

Prepared by: Josh Chou




65-21/R6C-FS1T1B/2T

Carrier Tape Dimensions: Loaded quantity per reel 2000 PCS/reel

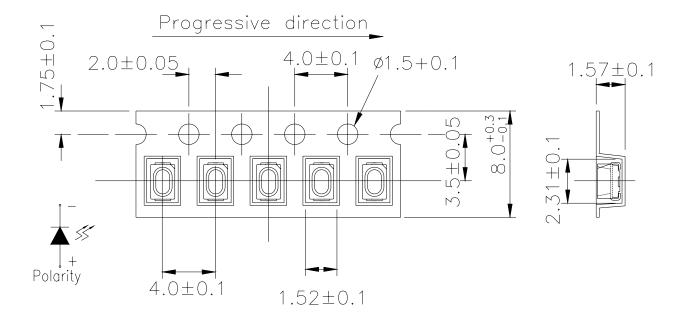

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

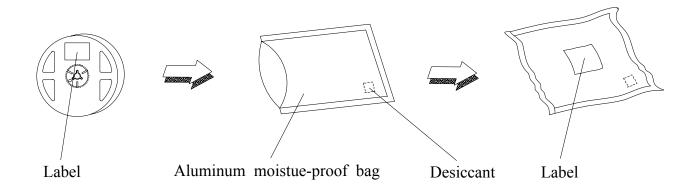

Everlight Electronics Co., Ltd.

Device No.: DSE-651-258

http://www.everlight.com

Prepared date: 04-Dec-2006

Rev. 1 Page: 7 of 10

Prepared by: Josh Chou



65-21/R6C-FS1T1B/2T

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Condition Test Hours/Cycles		Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H:+100°C 15min $ ∫ 5 min $ L:-40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : - 40° C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 10




65-21/R6C-FS1T1B/2T

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

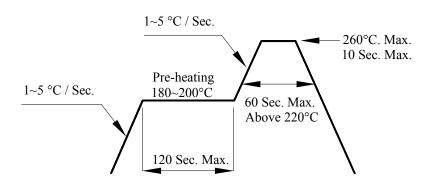

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10

Device No.: DSE-651-258 Prepared date: 04-Dec-2006 Prepared by: Josh Chou




65-21/R6C-FS1T1B/2T

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

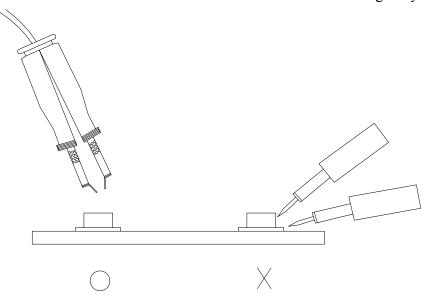

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 10