



## SURFACE MOUNT FAST RECOVERY RECTIFIER


VOLTAGE 50 to 1000 Volt CURRENT 1 Ampere


#### **FEATURES**

- For surface mounted applications in order to optimize board space
- · Easy pick and place
- · Fast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- · Glass passivated junction
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

## **MECHANICAL DATA**

- Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750,Method 2026
- Polarity: Color band denotes cathode end
- Standard packaging: 12mm tape (EIA-481)
- Weight: 0.0023 ounces, 0.0679 grams



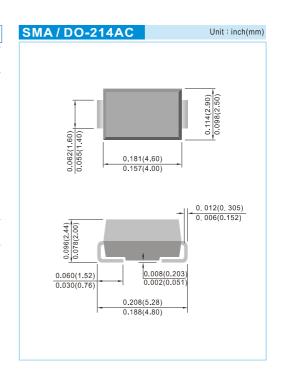

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

SYMBOL	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	UNITS
V <sub>RRM</sub>	50	100	200	400	600	800	1000	٧
V <sub>RMS</sub>	35	70	140	280	420	560	700	V
V <sub>DC</sub>	50	100	200	400	600	800	1000	V
I <sub>F(AV)</sub>	1						А	
I <sub>FSM</sub>	30							Α
V <sub>F</sub>	1.3					٧		
I <sub>R</sub>	1 150							μА
t <sub>rr</sub>	150 250 500			00	ns			
CJ	12					pF		
R <sub>eJA</sub> R <sub>eJL</sub>	100 32						°C / W	
T <sub>J</sub> ,T <sub>STG</sub>	-55 to +150						°C	
	V <sub>RRM</sub> V <sub>RMS</sub> V <sub>DC</sub> I <sub>F(AV)</sub> I <sub>FSM</sub> V <sub>F</sub> C R R BJA R BJA R BJA	V <sub>RRM</sub> 50  V <sub>RMS</sub> 35  V <sub>DC</sub> 50  I <sub>F(AV)</sub> I <sub>FSM</sub> V <sub>F</sub> C <sub>J</sub> R <sub>BJA</sub> R <sub>BJA</sub> R <sub>BJA</sub>	V <sub>RRM</sub> 50 100  V <sub>RMS</sub> 35 70  V <sub>DC</sub> 50 100  I <sub>F(AV)</sub> I <sub>FSM</sub> V <sub>F</sub> I <sub>R</sub> t <sub>rr</sub> 1  C <sub>J</sub> R <sub>θJA</sub> R <sub>θJA</sub> R <sub>θJL</sub>	V <sub>RRM</sub> 50         100         200           V <sub>RMS</sub> 35         70         140           V <sub>DC</sub> 50         100         200           I <sub>F(AV)</sub> I <sub>FSM</sub> V <sub>F</sub> I <sub>R</sub> t <sub>rr</sub> 150           C <sub>J</sub> R <sub>BJA</sub> R <sub>BJL</sub>	V <sub>RRM</sub> 50         100         200         400           V <sub>RMS</sub> 35         70         140         280           V <sub>DC</sub> 50         100         200         400           I <sub>F(AV)</sub> 1         1           I <sub>FSM</sub> 30         30           V <sub>F</sub> 1.3         1           I <sub>R</sub> 150         150           C <sub>J</sub> 12         100           R <sub>ØJA</sub> R <sub>ØJL</sub> 32	V <sub>RRM</sub> 50         100         200         400         600           V <sub>RMS</sub> 35         70         140         280         420           V <sub>DC</sub> 50         100         200         400         600           I <sub>F(AV)</sub> 1         1           I <sub>FSM</sub> 30         30           V <sub>F</sub> 1.3         1           I <sub>R</sub> 150         250           C <sub>J</sub> 12         1           R <sub>GJA</sub> R <sub>GJL</sub> 100 32         32	V <sub>RRM</sub> 50         100         200         400         600         800           V <sub>RMS</sub> 35         70         140         280         420         560           V <sub>DC</sub> 50         100         200         400         600         800           I <sub>F(AV)</sub> 1         30           V <sub>F</sub> 1.3         1         150         250         50           C <sub>J</sub> 150         250         50         50           C <sub>J</sub> 12         100         32         100         32	V <sub>RMS</sub> 35         70         140         280         420         560         700           V <sub>DC</sub> 50         100         200         400         600         800         1000           I <sub>F(AV)</sub> 1         30         1.3         1.3         1.50         1.50         250         500           C <sub>J</sub> 150         250         500         500         1.2         1.2         R <sub>BJA</sub> R <sub>BJL</sub> 100 R <sub>BJL</sub> 32

NOTES:1. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1A$ ,  $I_{rr}=0.25A$ 

- 2. Measured at 1 MHz and applied  $V_r = 4$  volts.
- 3. 8mm<sup>2</sup> (0.013mm thick) land areas.





#### **RATING AND CHARACTERISTIC CURVES**

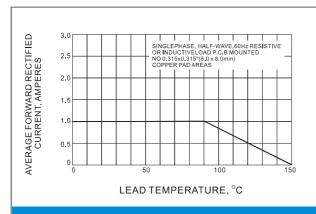


Fig.1 FORWARD CURRENT DERATING CURVE

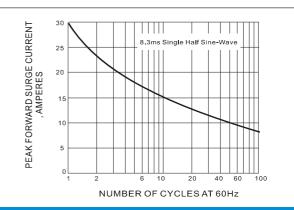


Fig.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

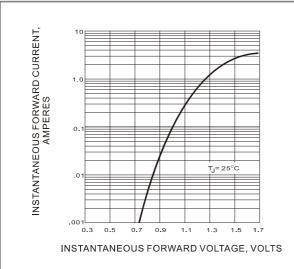


Fig.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

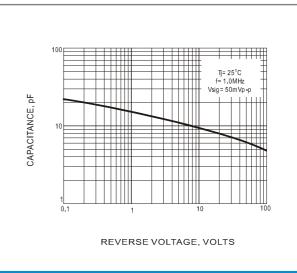


Fig. 4 TYPICAL JUNCTION CAPACITANCE


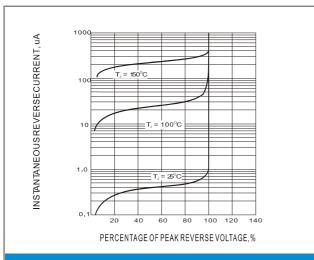


Fig.5-TYPICAL REVERSE CHARACTERISTIC





## **MOUNTING PAD LAYOUT**

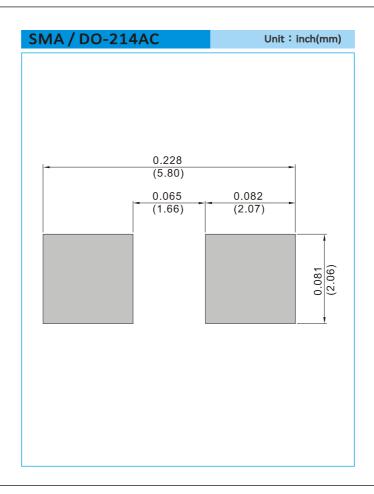

## **ORDER INFORMATION**

· Packing information

T/R - 7.5K per 13" plastic Reel

T/R - 1.8K per 7" plastic Reel






## Part No\_packing code\_Version

RS1A\_R1\_00001 RS1A\_R2\_00001

# For example :

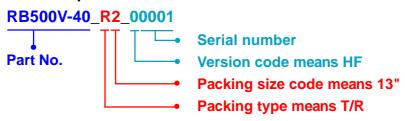

Packing Code XX				Version Code XXXXX				
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code		
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number		
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number		
Bulk Packing (B/P)	В	13"	2					
Tube Packing (T/P)	Т	26mm	X					
Tape and Reel (Right Oriented) (TRR)	s	52mm	Y					
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U					
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D					





## **Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
  of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
   Customers are responsible in comprehending the suitable use in particular applications.
   Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.