


## RAFIX 22 QR - Mushroom-headed pushbutton 40 mm, round collar, momentary 1.30.246.501/0307



| General information                  |  |
|--------------------------------------|--|
| Actuator                             | mushroom                                 |
| Color of mushroom                    | opaque red                               |
| Color of front ring                  | plastic slate-grey                       |
| Form of collar                       | round                                    |
| Dimensions                           |  |
| Dimensions of collar                 | ø 29.8 mm                                |
| Overall height                       | 20.1 mm                                  |
| Mounting depth                       | 56.4 mm                                  |
| Mounting hole                        | ø 22.3 mm                                |
| Mounting grid                        | 50 x 30 mm                               |
| Mechanical design                    |  |
| Mounting                             | ring nut                                 |
| Contact function                     | momentary                                |
| Illuminability                       | no                                       |
| Mechanical characteristics           |  |
| Operating force max.                 | approx. 5 N for 1 switching element      |
| Robustness max.                      | 100 N                                    |
| Electrical characteristics           |  |
| Protection class                     | -  |
| Other specifications                 |  |
| Operating life (operations)          | 1,000,000 cycle                          |
| Degree of protection from front side | IP65 (DIN EN 60529)                      |
| Ambient temp. operating min.         | -25 °C                                   |
| Ambient temp. operating max.         | +70 °C                                   |
| Storage temperature min.             | -40 °C                                   |
| Storage temperature max.             | +80 °C                                   |
| Environmental restistance            | acc. to IEC 60068-2-14, -30, -33 and -78 |
| ROHS compliant                       | yes                                      |
| REACH compliant                      | yes                                      |
|                                      |  |



## Panel cut-out to IEC 60947-5-1

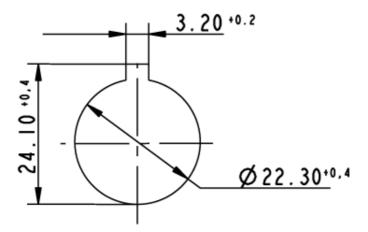

## metal

