SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REDUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA C22.2, # 8 VOE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 10 AMP, 120/250 VAC,

10 AMP/40°C, 250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

0.25 mA@ 120V 60Hz 0.50 mA@ 250V 50Hz

EPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, In.

1 3 5 10

16

32 38 47

19 19 39 40

MHz

COMMON

dΒ

DIFF.

dΒ

3

1

1

5 14 20

2

10

IN AN AMBIENT, I_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_0 - \sqrt{85 - I_0}$

 $I_0 = I_r \neg$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONOS

CUSTOMER DRAWING CATALOG # 10EBF1 ECN # | APPRVD. | DATE 13-019328 TAM 10DEC13

CUSTOMER DRAWING 10EBF1

6609018-7

В

CATALOG NO.

10EBF1

TYCO ELECTRONICS PART NO.

IDRV. BY:

NTS DATE: 050EC08

ORIG:

TEST SPECIFICATIONS:

INDUCTANCE: 0.35 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND:

0.0058 µF ±20% 0.0485 µF ±20%

LINE TO LINE:

DISCHARGE RESISTOR: L/G AND L/L I.R.

1.5 MA

NO DISCHARGE RESISTOR:

6000M₁ (MIN.) @ 100VDC,

20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500VAC DR 2250VDC FOR I MINUTE

1450VDC FOR 1 MINUTE LINE TO LINE:

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

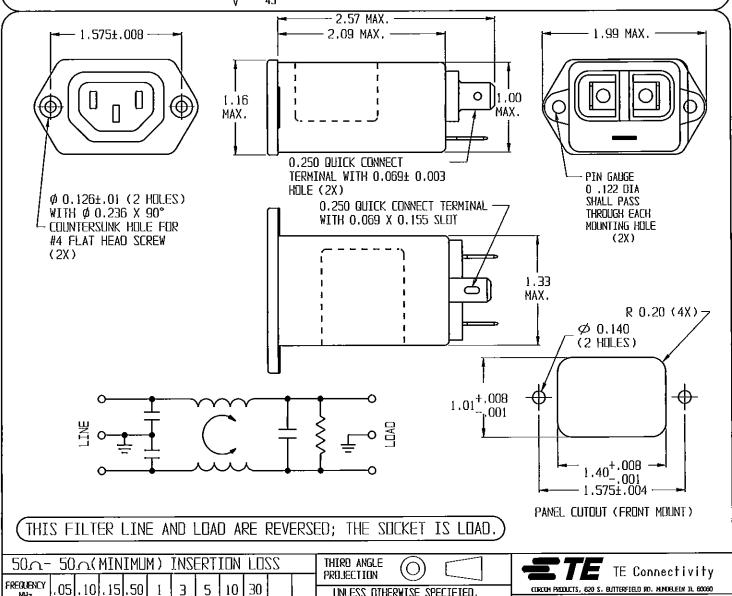

UNLESS OTHERWISE SPECIFIED,

MATERIAL & FINISH: AS SUPPLIED

THIS INCOMITION IS CONTINUITY. AND PREPRIETARY TO IYOU BECKRINGS CORPORATION AND ITS VORDINGE SUBSTITUTES AND AFFILTANES. IT HAN DUT BE DISJUICED TO AND OF THEM THAN THE BECKRINGS OF THE AND OF THE THAN THE BECKRINGS FRESONE. WITHOUT WRITTEN AUTHORIZATION FROM THE BECKRINGS OF GROWNION.

WARRISTERS, PENSTLYAKIA USA

TOLERANCE TO BE ±.025