





## Features

- Low forward voltage drop.
- Fast switching.
- Ultra-small surface mount package.
- PN junction guard ring for transient and ESD protection.



**SOT-523**

## Schematic Diagram and Marking
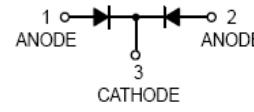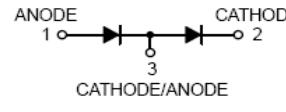
<b>GSBAT54T</b>  <b>Marking: L1</b>	<b>GSBAT54AT</b>  <b>Marking: L2</b>
<b>GSBAT54CT</b>  <b>Marking: L3</b>	<b>GSBAT54ST</b>  <b>Marking: L4</b>

## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$	30	V
Working Peak Reverse Voltage	$V_{RWM}$	30	V
DC Reverse Voltage	$V_R$	30	V
Forward Continuous Voltage	$I_F$	200	mA
Repetitive Peak Forward Voltage	$I_{FRM}$	300	mA
Non-repetitive Peak Forward Surge Current @ $t < 1.0\text{s}$	$I_{FSM}$	600	mA
Power Dissipation <sup>1</sup>	$P_D$	150	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	667	°C/W
Junction Temperature	$T_J$	125	°C
Storage Temperature Range	$T_{STG}$	-55 to +150	°C

Note:

1. Part mounted on FR-4 board with recommended pad layout.

**Electrical Characteristics** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Conditions	Min	Max	Unit
Reverse Breakdown Voltage	$V_{BR}$	$I_R=100\mu\text{A}$	30	-	V
Forward Voltage <sup>2</sup>	$V_F$	$I_F=0.1\text{mA}$	-	0.24	V
		$I_F=1\text{mA}$	-	0.32	V
		$I_F=10\text{mA}$	-	0.40	V
		$I_F=30\text{mA}$	-	0.50	V
		$I_F=100\text{mA}$	-	1.00	V
Reverse Current <sup>3</sup>	$I_R$	$V_R=25\text{V}$	-	2	$\mu\text{A}$
Capacitance Between Terminals	$C_T$	$V_R=1\text{V}$ , $F=1\text{MHz}$	-	10	pF
Reverse Recovery Time	$t_{rr}$	$I_F=I_R=10\text{mA}$ , $I_{rr}=0.1 \times I_R$ , $R_L=100\Omega$	-	5	ns

Notes:

2. Pulse test:  $T_P \leq 300\text{us}$ .
3. Pulse test:  $T_P \leq 5\text{ms}$ .

**Typical Electrical Characteristic Curves**

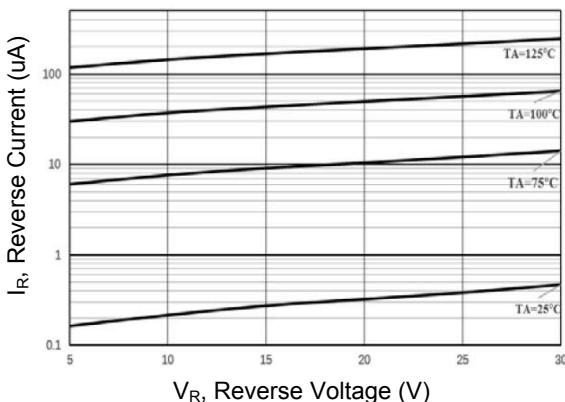


Figure 1. Typical Reverse Characteristics

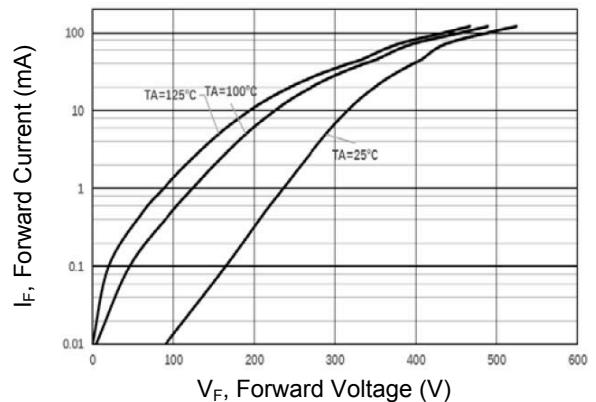


Figure 2. Typical Forward Characteristics

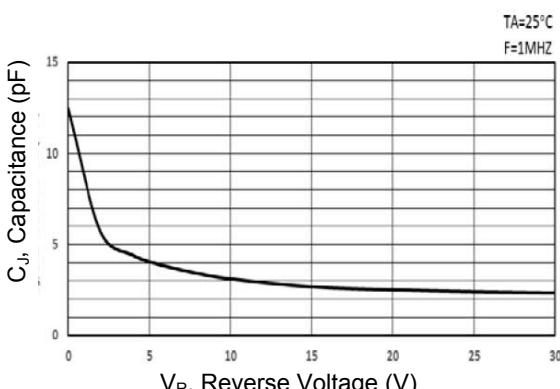


Figure 3. Capacitance vs. Reverse Voltage


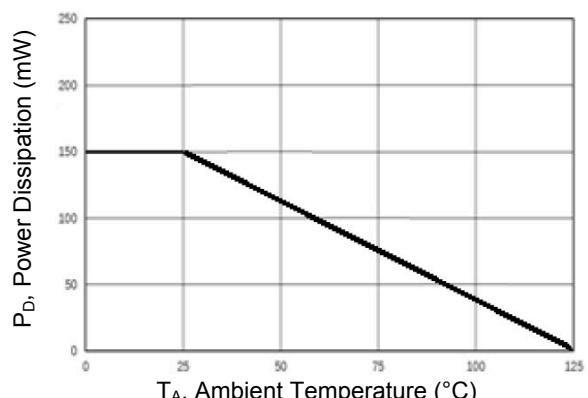


Figure 4. Derating Curve

**Package Outline Dimensions (SOT-523)**

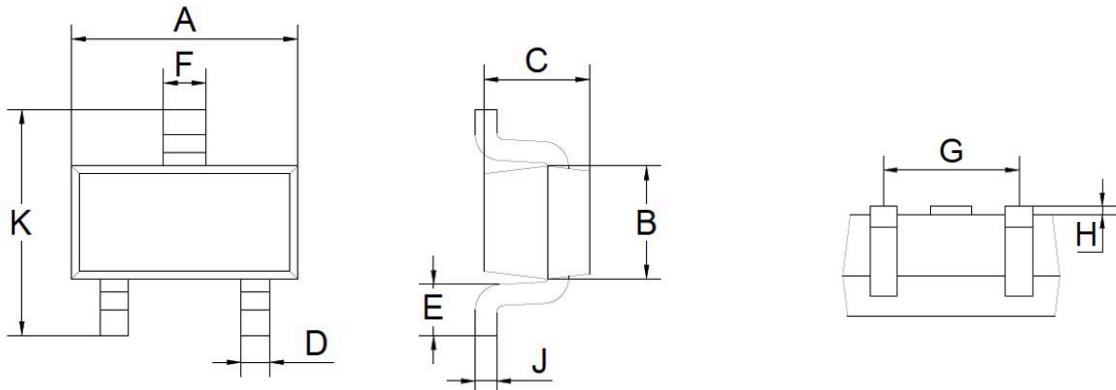

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	1.500	1.700	0.059	0.067
B	0.750	0.850	0.030	0.033
C	0.600	0.800	0.024	0.031
D	0.150	0.300	0.006	0.012
E	0.300	0.400	0.012	0.016
F	0.250	0.400	0.010	0.016
G	0.900	1.100	0.035	0.043
H	0.020	0.100	0.001	0.004
J	0.080	0.180	0.003	0.007
K	1.450	1.750	0.057	0.069

**Recommended Pad Layout**

