

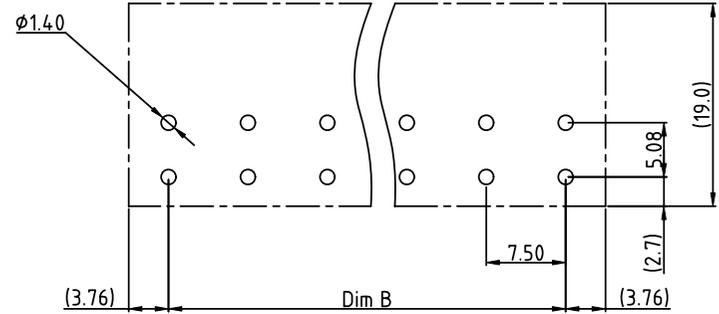
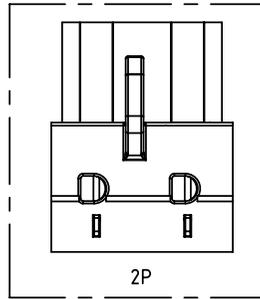
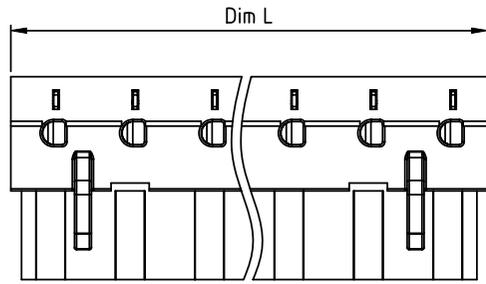


PRODUCT NUMBER	PITCH
V7xxA1x100J0G	7.50 mm

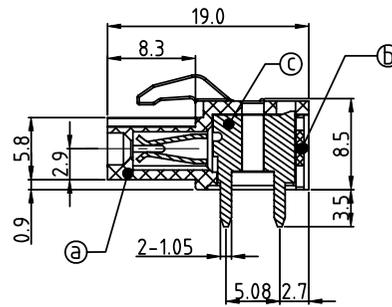

RECOMMENDED P.C.B LAYOUT
TOP VIEW

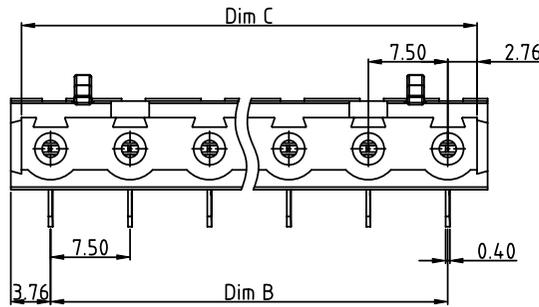

Material:

- Item Ⓐ Terminal body: Thermoplastic (UL94V-0)
- Item Ⓑ Terminal Cover: Thermoplastic (UL94V-0)
- Item Ⓒ Female contact: PhBz(CuSn), Tin plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

PART NO.: V7 xx A 1 x 1 00J0 G

N=Number of poles
 Dim L=(N-1)×7.50+7.52
 Dim B=(N-1)×7.50
 Dim C=(N-1)×7.50+5.52

poles	Tolerance
2-5p	±0.15
6-10p	±0.25
11-16p	±0.35

Solid block	No. of poles	Color	RoHS compliant
0	2	Black (RAL9005)	lead<4% In copper Alloy
2	3	Red (RAL3001/D)	
02	3	Orange(RAL2011/P)	
03	4	Yellow(RAL1018/A)	
...	5	Green(RAL6018/T)	
16	6	Blue (RAL5015/A)	
	8	Grey(RAL7035/D)	
	9	White(RAL1102)	
	C	Green(RAL6018/U)	

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family TERMINAL BLOCK
ltr	ecn no	dr	date		title TERMINAL BLOCK
tolerances unless otherwise specified				MM	PLUGGABLE PCB PLUG, WITH FLANGE, RIGHT ANGLE
angles		X.±0.5		scale	dwg no V7xxA1x100J0G
X°±1'		X.XX±0.1			
dr	EVIN ZHONG	043014			size A4
enr	EVIN ZHONG	043014			type CUSTOMER Drawing
chr	HANKE FENG	043014			
appd	SHI JUN	043014			
sheet index	revision sheet	A	1		