

| LLF50 & LLF60 SERIES

VERTICAL FAST LIFT FLOAT SWITCHES






Technical

		LLF59	LLF69	
Material	Stem	Nylon	PPS	
	Float	Buna	Buna	
Temp. Range	°C	-20/+75		
	°F	-4/+167		
Min. Fluid SG		0.45		
Must Close Level (SG=1)		10mm		
Must Open Level (SG=1)		12mm		

^{*} Temperature ranges refer to wetted parts.



The LLF uses a large diameter Buna float to allow operation in SG as low as 0.45. The switch is capable of operating in as low as 6mm of water.

Two standard lengths are available with either make on rise or make on fall switching action.

Typical uses include drip tanks, hatch alarms and other applications where highly sensitive liquid detection is required.

Features

- Operates in 10mm minimum liquid
- 50mm & 200mm length versions
- Vertical mount M12 or M16
- Will operate in low SG (0.45)

Electrical

Contact Form		N/O (N/C)	
Switching Power Max	VA	25	
Switching Voltage AC Max	V	240	
Switching Voltage DC Max	V	120	
Switching Current Max	А	0.6	

All ratings are for resistive load only.




	Material	Switch Action	Leadouts	Gasket
LLF59Y100JC	Nylon/Buna	Make on rise	100cm 2 core PVC 7/0.2	Nitrile
LLF59Y100JC004	Nylon/Buna	Make on fall	100cm 2 core PVC 7/0.2	Nitrile
LLF69A198	PPS/Buna	Make on rise	100cm 2 core PVC 7/0.2	Nitrile
LLF69B198	PPS/Buna	Make on fall	100cm 2 core PVC 7/0.2	Nitrile

Custom versions can be made for particular applications. Please contact Sensata with your requirements.





All dimensions are in millimeters.

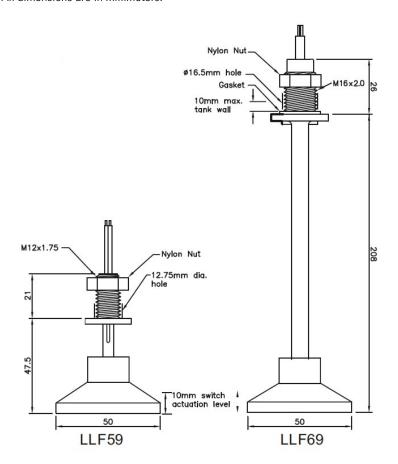

Made in the UK

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

+44 (0)1202 897969 c3w_sales@sensata.com Cynergy3 Components Ltd. 7 Cobham Road, Ferndown Industrial Estate, Wimborne, Dorset, BH21 7PE, United Kingdom