

THIS MODULE HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

OPERATING SPECIFICATIONS

LINE FREQUENCY: 50-60Hz




STORAGE TEMPERATURE: -40°C TO +85°C
HUMIDITY: 21 DAYS @ 40°C 95% RH.
CURRENT OVERLOAD TEST: 6 TIMES I_F FOR
8 SECONDS

L/G AND L/L I.R. @ 6000M (MIN.) 100VDC,
20°C AND 50% RH


CATALOG # 6ESRM-3

ECN#	APPRVD	DATE
13-014594	TAM	13SEP13

LINE TO GROUND: 1500 VAC FOR 1 MINUTE
LINE TO LINE: 1450 VDC FOR 1 MINUTE

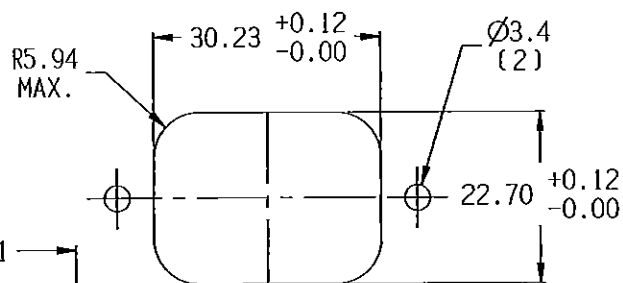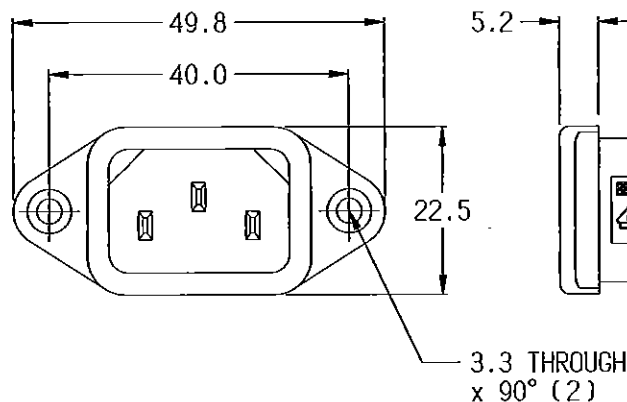

REAR MOUNT PANEL CUTOUT



50 Ω - 50 Ω (MINIMUM) INSERTION LOSS													
FREQUENCY MHz	/	/	/	/	/	/	/	/	/	/	/	/	/
COMMON dB	/	/	/	/	/	/	/	/	/	/	/	/	/
DIFF. dB	/	/	/	/	/	/	/	/	/	/	/	/	/
SHEET SIZE	THIRD ANGLE PROJECTION			THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUNDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA, USA.									
	 												

PARTS SHALL COMPLY WITH TYCO ELECTRONICS 138-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES

UNLESS OTHERWISE SPECIFIED
TOLERANCE TO BE ± 0.63
MATERIAL & FINISH: AS SUPPLIED

NOTES:



ORION PRODUCTS, 620 S. BUTTERFIELD RD., HUNDELEIN, IL 60060

CUSTOMER DRAWING

TYCO ELECTRONICS PART NO. 1609133-3

SCALE: 1:1	DATE: 17FEB10	DRAWING NUMBER: 6ESRM-3	REV: D
DRW. BY: LJD	DRG: ECW		