

Features

- V_F , R_D and C_J Matching Options
- Chip, Beam Lead and Packaged Devices
- Hi-Rel Screening per MIL-PRF-19500 and MIL-PRF-38534 Available



Description

The MSS40-xxx-x Series of Schottky diodes are fabricated on N-Type epitaxial substrates using proprietary processes that yield the highest FCOs in the industry. Optimum mixer performance is obtained with LO power of 0 dBm to +6 dBm per diode.

Chip

Electrical Specifications: $T_A = 25^\circ\text{C}$

Model	Configuration	V_F Typ. V	V_{BR} Min. V	C_J Typ. / Max. pF	R_S Typ. Ω	R_D Max. Ω	F_{CO} Typ. GHz	Outline
MSS40-045-C15	Single Junction	0.42	3	0.09 / 0.12	7	15	253	C15
MSS40-048-C15	Single Junction	0.40	3	0.12 / 0.15	7	15	190	C15
Test Conditions		$I_F = 1 \text{ mA}$	$I_R = 10 \mu\text{A}$	$V_R = 0 \text{ V}$ $F = 1 \text{ MHz}$	$I = 5 \text{ mA}$			

Beam Lead

Electrical Specifications: $T_A = 25^\circ\text{C}$

Model	Configuration	V_F Typ. V	V_{BR} Min. V	C_J Typ. / Max. pF	R_S Typ. Ω	R_D Max. Ω	F_{CO} Typ. GHz	Outline
MSS40-141-B10B	Single Junction	0.42	3	0.06 / 0.10	10	22	265	B10B
MSS40-148-B10B	Single Junction	0.40	3	0.12 / 0.15	7	17	190	B10B
MSS40-155-B10B	Single Junction	0.38	3	0.25 / 0.30	5	13	127	B10B
MSS40-244-B20	Series Tee	0.44	3	0.08 / 0.12	19	22	105	B20
MSS40-248-B20	Series Tee	0.44	3	0.12 / 0.15	10	17	133	B20
MSS40-255-B20	Series Tee	0.38	3	0.25 / 0.30	5	15	127	B20
MSS40-448-B41	Ring Quad	0.40	3	0.12 / 0.15	7	17	190	B41
MSS40-455-B40	Ring Quad	0.38	3	0.25 / 0.30	5	17	127	B40
MSS40-CR46-B49	Crossover Ring Quad	0.35	3	0.12 / 0.20	10	22	177	B49
Test Conditions		$I_F = 1 \text{ mA}$	$I_R = 10 \mu\text{A}$	$V_R = 0 \text{ V}$ $F = 1 \text{ MHz}$	$I = 5 \text{ mA}$			

(Continued next page)

Packaged

Electrical Specifications: $T_A = 25^\circ\text{C}$


Model	Configuration	V_F Typ. V	V_{BR} Min. V	C_J Typ. / Max. pF	R_S Typ. Ω	R_D Max. Ω	F_{CO} Typ. GHz	Outline
MSS40-045-P55	Single Junction	0.42	3	0.21 / 0.27	7		253	P55
MSS40-045-P86	Single Junction	0.42	3	0.24 / 0.30	7		253	P86
MSS40-048-P55	Single Junction	0.40	3	0.24 / 0.30	7		190	P55
MSS40-048-P86	Single Junction	0.40	3	0.27 / 0.33	7		190	P86
MSS40-141-E25	Single Junction	0.42	3	0.16 / 0.22	10		265	E25
MSS40-141-H20	Single Junction	0.42	3	0.24 / 0.30	10		265	H20
MSS40-148-E25	Single Junction	0.40	3	0.22 / 0.28	7		190	E25
MSS40-148-H20	Single Junction	0.40	3	0.30 / 0.36	7		190	H20
MSS40-155-E25	Single Junction	0.38	3	0.35 / 0.41	5		127	E25
MSS40-155-H20	Single Junction	0.38	3	0.43 / 0.50	5		127	H20
MSS40-244-E35	Series Tee	0.44	3	0.18 / 0.24	19		105	E35
MSS40-248-E35	Series Tee	0.44	3	0.22 / 0.28	10		133	E35
MSS40-255-E35	Series Tee	0.38	3	0.35 / 0.41	5		127	E35
MSS40-448-E45	Ring Quad	0.40	3	0.24 / 0.30	7		190	E45
MSS40-455-E45	Ring Quad	0.38	3	0.32 / 0.38	5		127	E45
MSS40-455-H40	Ring Quad	0.38	3	0.42 / 0.48	5		127	H40
Test Conditions		$I_F = 1 \text{ mA}$	$I_R = 10 \mu\text{A}$	$V_R = 0 \text{ V}$ $F = 1 \text{ MHz}$	$I = 5 \text{ mA}$			

Absolute Maximum Ratings


Parameters	Rating
Reverse Voltage	Rated V_{BR}
Forward Current	50 mA
Power Dissipation	100 mW, per junction @ $T_A = 25^\circ\text{C}$, derate linearly to 0 @ $T_A = +150^\circ\text{C}$
Operating Temperature	-65°C to $+150^\circ\text{C}$
Storage Temperature	-65°C to $+150^\circ\text{C}$
Soldering Temperature (packaged)	$+230^\circ\text{C}$ for 5 seconds
Beam Lead Pull Strength	4 G minimum

Typical Performance Curves: $T_A = 25^\circ\text{C}$


Forward Voltage vs. Current

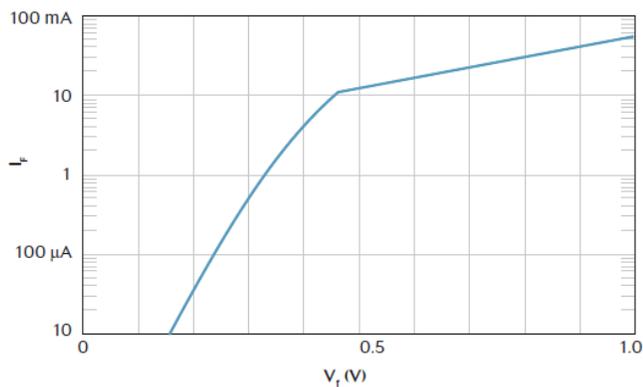


Reverse Current vs. Voltage

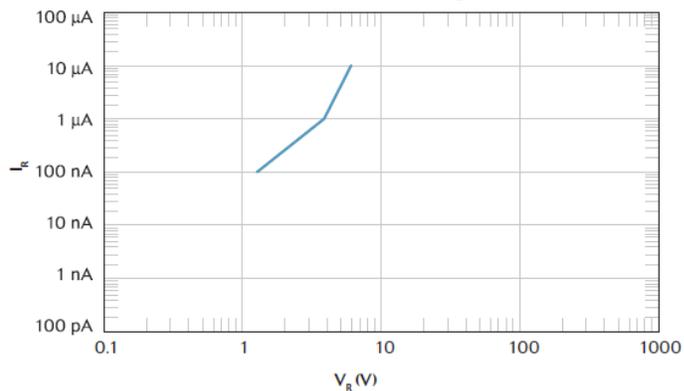







NF & Z_{IF} vs. LO Power

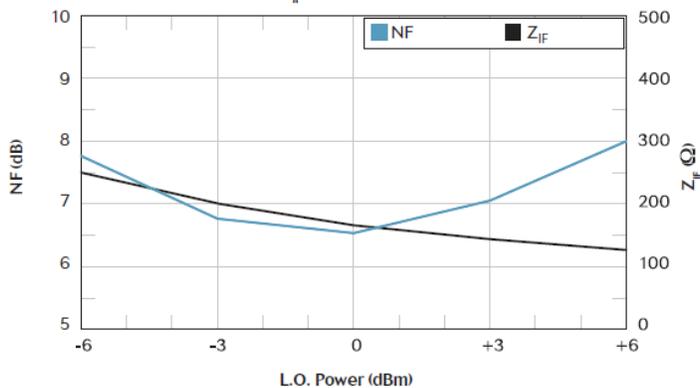


Smith Chart - 50 Ω Reference

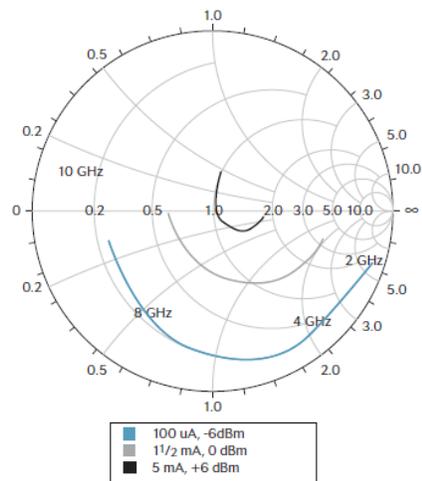

Outline Drawings

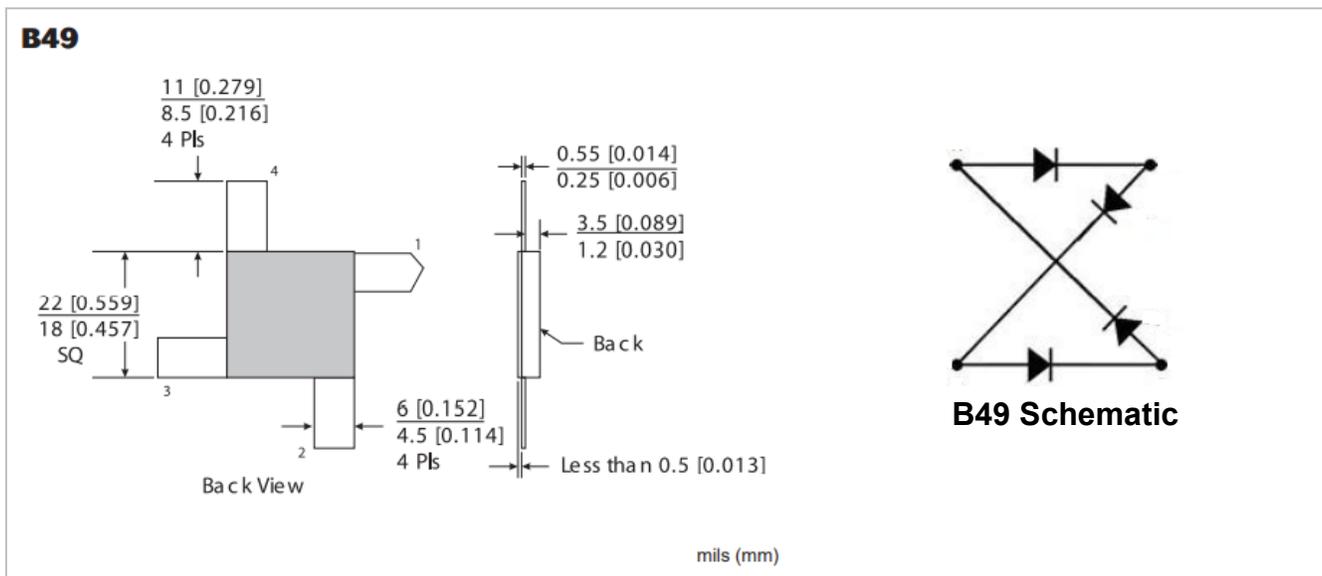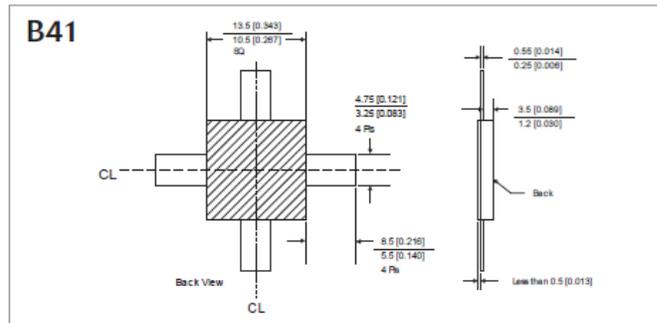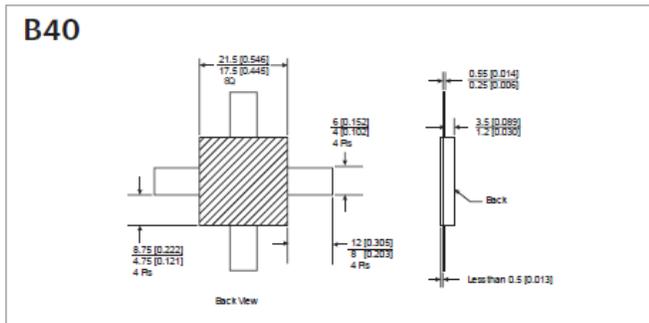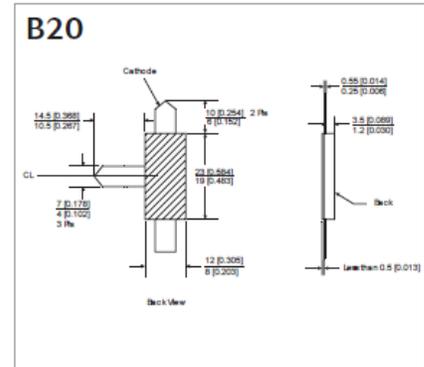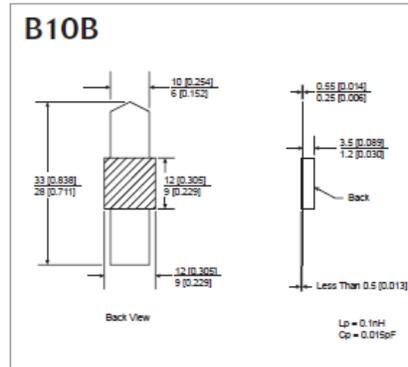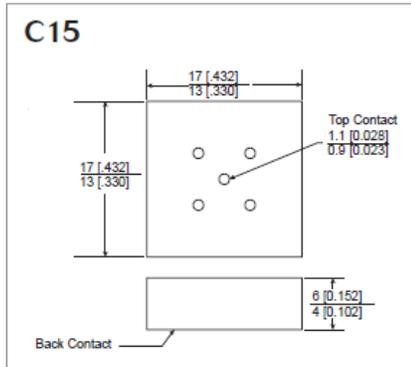

Outline Drawings

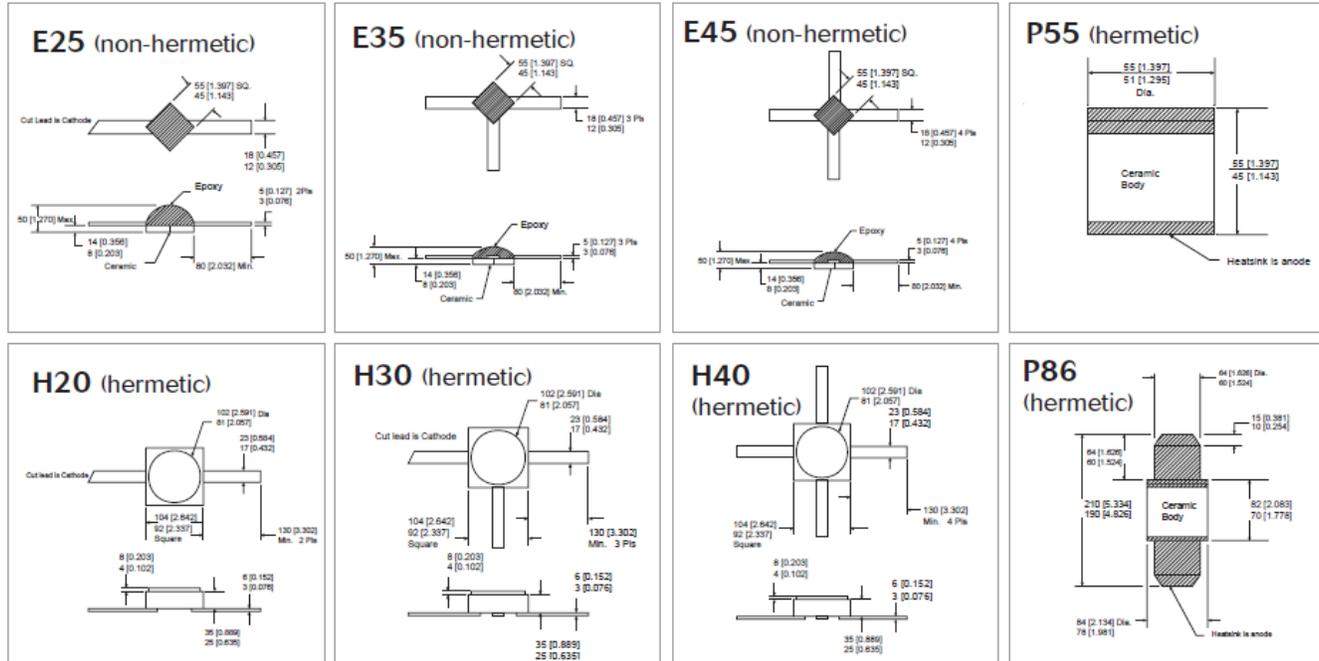

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.