
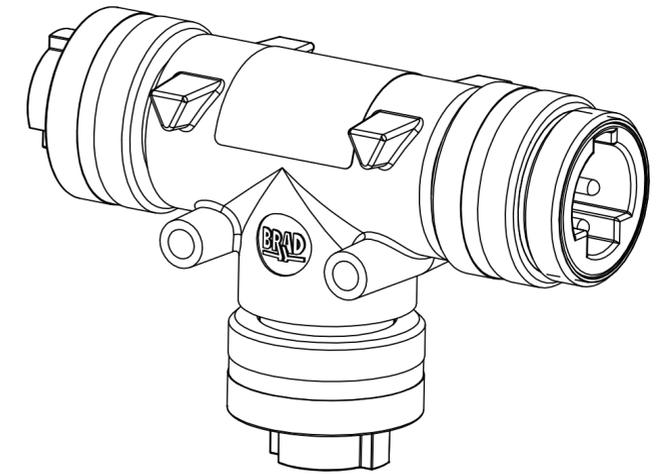


WIRE DIAGRAM

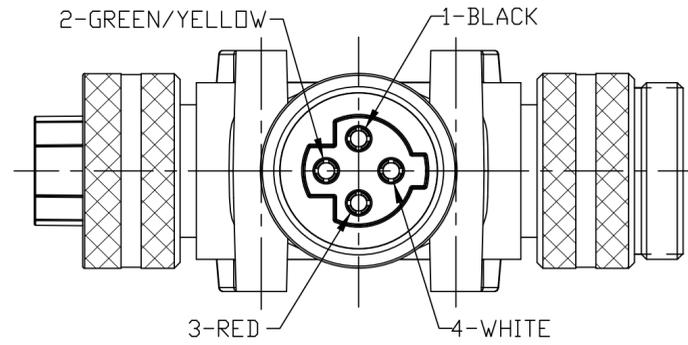

- NOTES:**
1. MATERIAL: AS NOTED
 2. FINISH: AS NOTED
 3. ELECTRICAL:
 VOLTAGE: 480V PER IEC60664
 600V PER UL2237
 MAX THRU CURRENT: 32A
 MAX DROP CURRENT: 32A
 4. TEMP RATING: -20° TO +90°C
 5. PROTECTION: IP67 (WHEN MATED)
 6. CERTIFICATION:
 UL LISTED/CSA CERTIFIED FILE NO: E258922

PART NUMBER	ENGINEERING NUMBER
1300680086	TC41C41-200

ITEM	DESCRIPTION	MATERIAL	FINISH
8	LABEL	POLYESTER	BLACK/DRANGE
7	QC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	QC FEMALE INSERT	PVC	BLACK
5	QC FEMALE COUPLING NUT	ALUMINUM	BLACK ANODIZE
4	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	QC MALE INSERT	PVC	BLACK
2	QC MALE COUPLING NUT	ALUMINUM	BLACK ANODIZE
1	OVERMOLD	PVC	BLACK
ITEM	DESCRIPTION	MATERIAL	FINISH

ENG NO. WAS TC41C40-200 EC NO: IPG2018-0357 DRWN: RSTONE 1/17/18 CH'KD: C CHRAST 2018/01/18 APPR: BWOODMAN2010/01/15	QUALITY SYMBOL ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES	±---	±---	DRAWN BY	DATE	TITLE BRAD POWER QC 4 POLE TEE W/4 POLE QC DROP			
		3 PLACES	±---	±---	KJOZWIK	2010/01/14				
		2 PLACES	±---	±---	CHECKED BY	DATE	MOLEX INCORPORATED			
1 PLACE	±---	±---	BWOODMAN	2010/01/14						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±---°		APPROVED BY	DATE	MOLEX INCORPORATED		SHEET NO. 1 OF 1		
		SEE TABLE		JFMURPHY	2010/01/15					
B1		REV		MATERIAL NO.		DOCUMENT NO.		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
				SEE TABLE		SD-130068-012				