Customer Information Sheet

DRAWING No.: M80-5T10405M3-02-331-00-000 IF IN DOUBT - ASK NOT TO SCALE SHEET 2 OF 2 THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

SPECIFICATIONS:

MATERIAL:

MOULDING: GLASS FILLED PPS, UL94V-O, BLACK

SIGNAL CONTACT: PHOSPHOR BRONZE POWER CONTACT: COPPER ALLOY

BOARD-MOUNT JACKSCREW, NUT: STAINLESS STEEL

FINISH:

SIGNAL CONTACT: 0.75µ GOLD POWER CONTACT: GOLD

ELECTRICAL:

WORKING VOLTAGE = 800V AC/DC

VOLTAGE PROOF = 1200V AC/DC INSULATION RESISTANCE = $100M\Omega$ MIN

SIGNAL CONTACT:

CURRENT RATING AT 25°C = 3.0A MAX

CURRENT RATING AT 85°C = 2.2A MAX

CONTACT RESISTANCE = $25m\Omega$ MAX

POWER CONTACT:

CONTACT RESISTANCE $6m\Omega$ MAX

CURRENT RATING = 20A MAX

MECHANICAL:

DURABILITY = 500 OPERATIONS

SIGNAL CONTACT:

INSERTION FORCE = 2.0N MAX WITHDRAWAL FORCE = 0.2N MIN

POWER CONTACT:

INSERTION FORCE = 8.0N MAX

WITHDRAWAL FORCE = 0.5N MIN

ENVIRONMENTAL:


TEMPERATURE RANGE = -55°C TO +125°C


PACKING: TUBE


FOR COMPLETE SPECIFICATION SEE COMPONENT


SPECIFICATION COO5XX (LATEST ISSUE)


I. CONNECTORS ARE SUPPLIED WITH NUTS LOOSE.

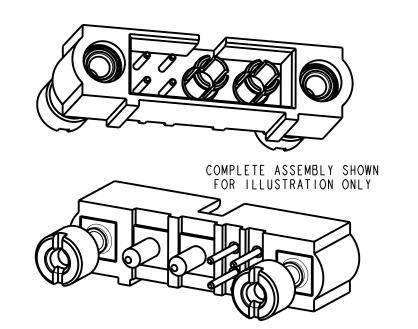

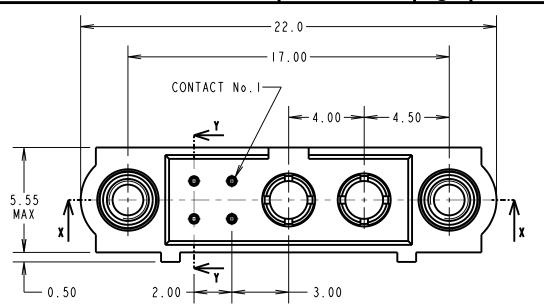

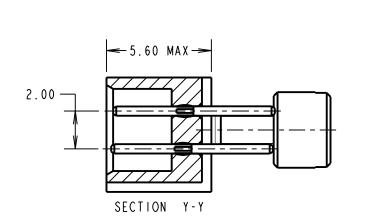

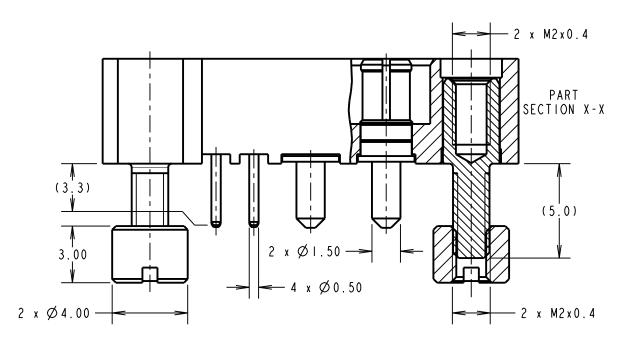

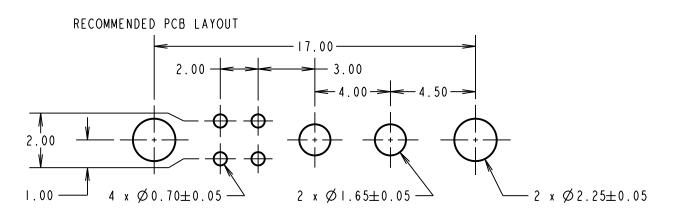

	FM	2	04.10.17	13269
	NAME	188.	DATE	C/NOTE
	APPROVED: F. MCGOWAN CHECKED: S. BENNETT			
	DRAWN: S.BENNETT			
	CUSTOMER REF.:			
	ASSEM	IBLY C	ORG:	

HARWIN
www harwin com

technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

X. = ±1mm X.X = ±0.50mm X.XX = ±0.10mm $X.XXX = \pm 0.01$ mm ANGLES = ±5°

TOLERANCES

UNLESS STATED

MATERIAL: SEE ABOVE

SEE ABOVE

FINISH:

S/AREA:

JACKSCREW DATAMATE MIXED TECHNOLOGY VERTICAL PC TAIL MALE ASSEMBLY

DRAWING NUMBER:

M80-5T10405M3-02-331-00-000 CF2