



Electrical specifications

Center Frequency: 1390 MHz
Bandwidth: 100 MHz
VSWR: 2.0 : 1
Input / Output Impedance: 50 Ohms
Passband: 1340-1440 MHz
Passband Insertion Loss: 2.0 dB max
Passband Ripple: 3.0 dB max
Rejection: 40 dB min at 1200 MHz
Rejection 2: 45 dB min at 1700 MHz
Power Handling: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 13 x 12 x 4.5 mm

Environmental

Operating Temperature: -20°C to +70°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

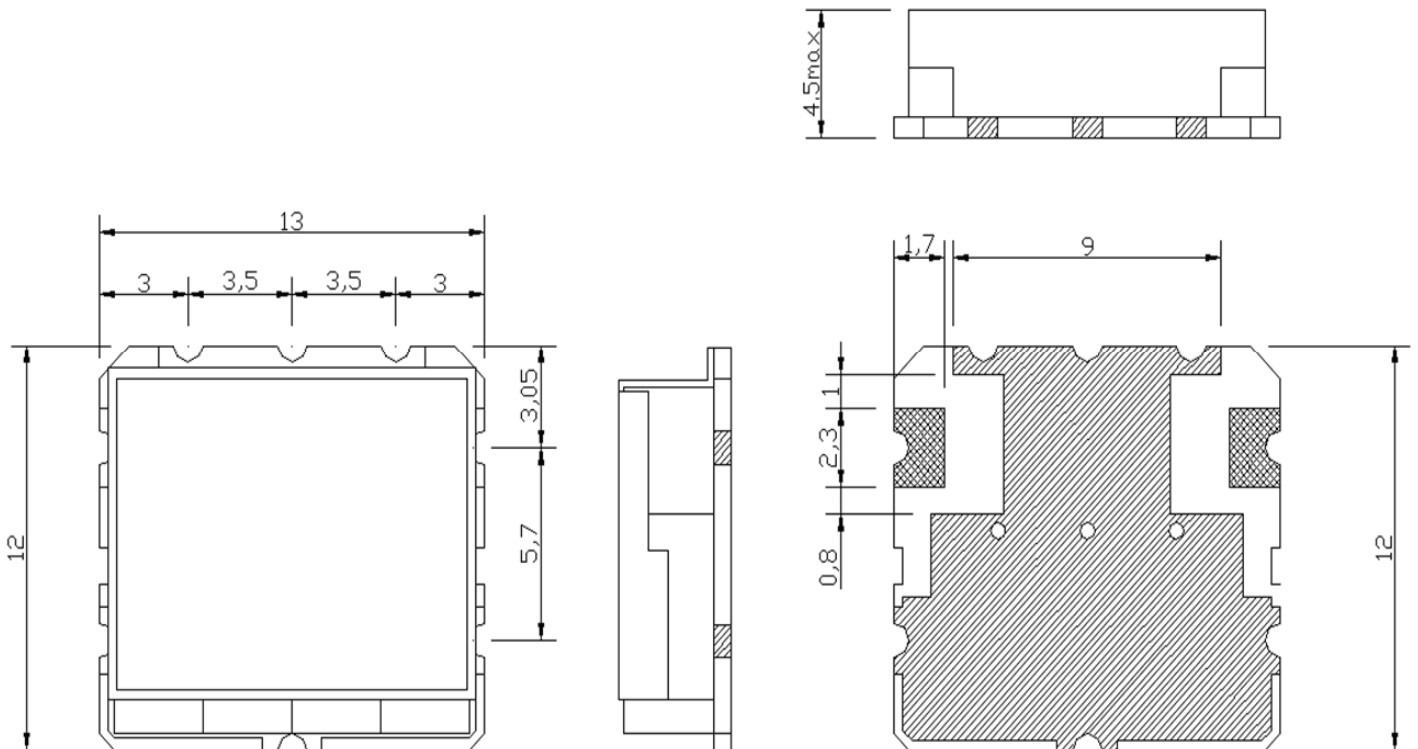

Unit:mm
Tolerance:±0.3