


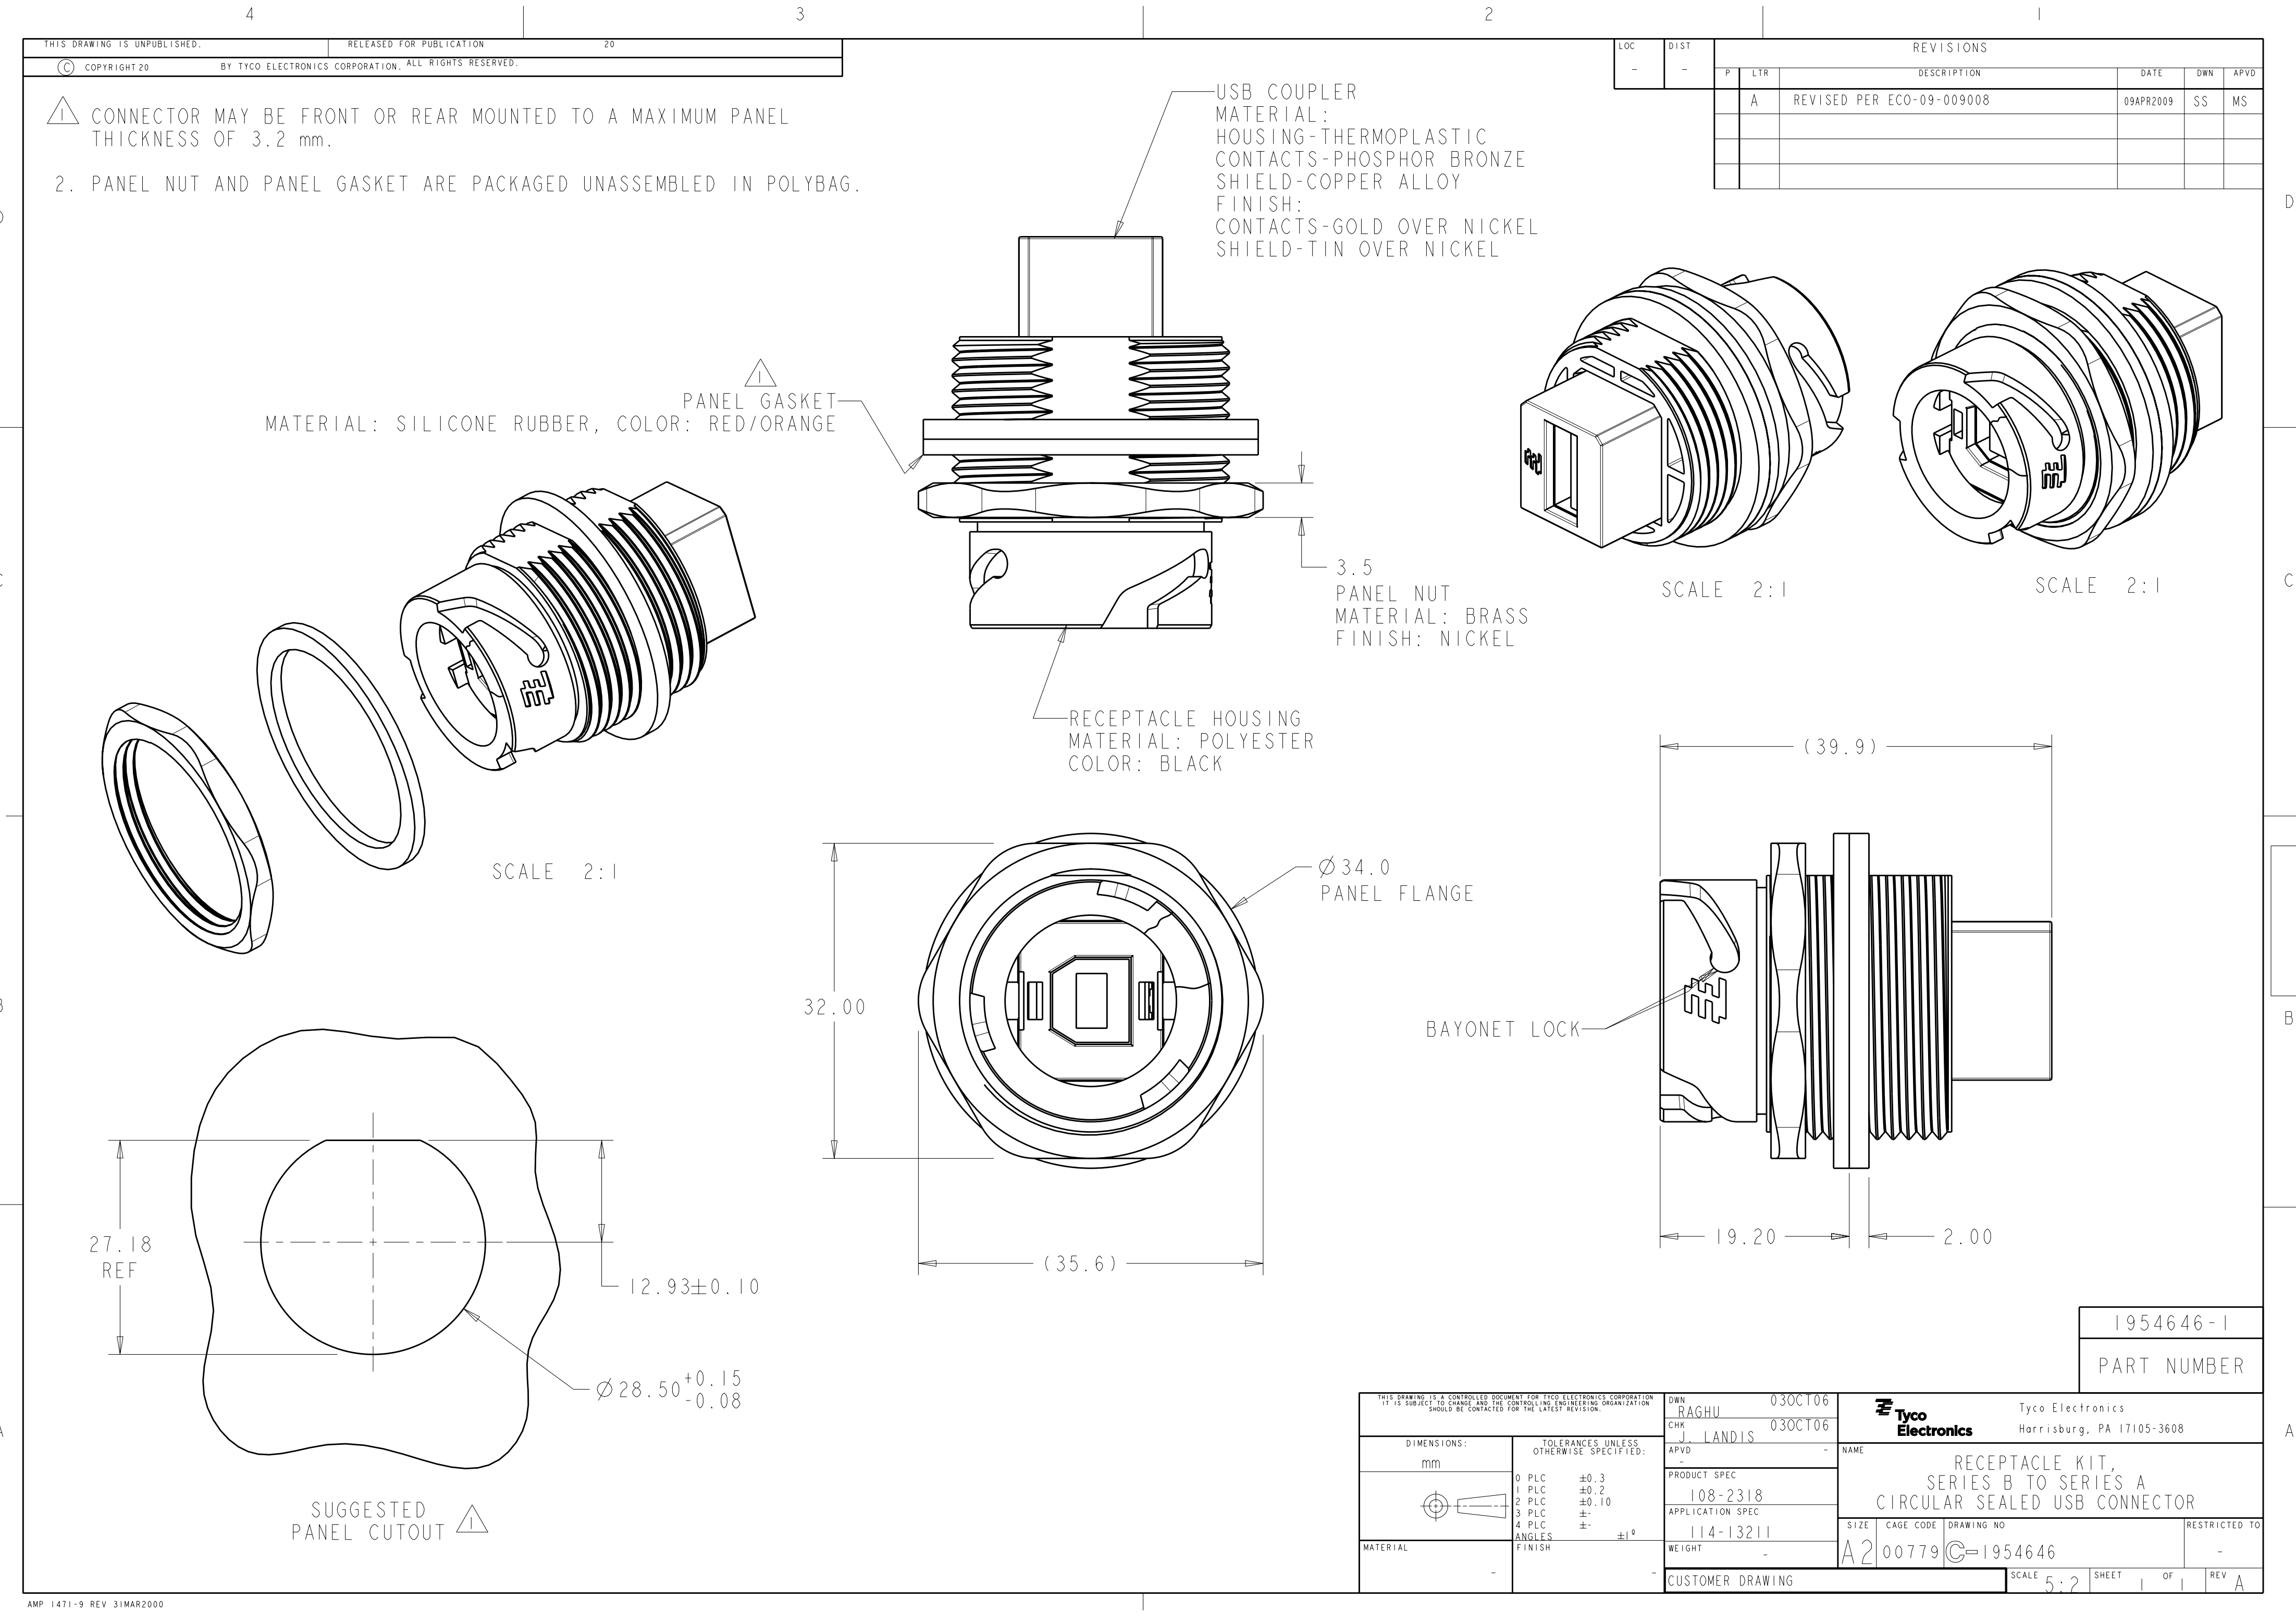

1. CONNECTOR MAY BE FRONT OR REAR MOUNTED TO A MAXIMUM PANEL THICKNESS OF 3.2 mm.
2. PANEL NUT AND PANEL GASKET ARE PACKAGED UNASSEMBLED IN POLYBAG.

USB COUPLER
MATERIAL:
HOUSING-THERMOPLASTIC
CONTACTS-PHOSPHOR BRONZE
SHIELD-COPPER ALLOY
FINISH:
CONTACTS-GOLD OVER NICKEL
SHIELD-TIN OVER NICKEL

PANEL GASKET
MATERIAL: SILICONE RUBBER, COLOR: RED/ORANGE

RECEPTACLE HOUSING
MATERIAL: POLYESTER
COLOR: BLACK

3.5
PANEL NUT
MATERIAL: BRASS
FINISH: NICKEL

Ø 34.0
PANEL FLANGE

BAYONET LOCK

SCALE 2:1

SCALE 2:1

SCALE 2:1


27.18
REF

12.93±0.10

Ø 28.50^{+0.15}_{-0.08}

SUGGESTED
PANEL CUTOUT

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER ECO-09-009008			09APR2009	SS	MS

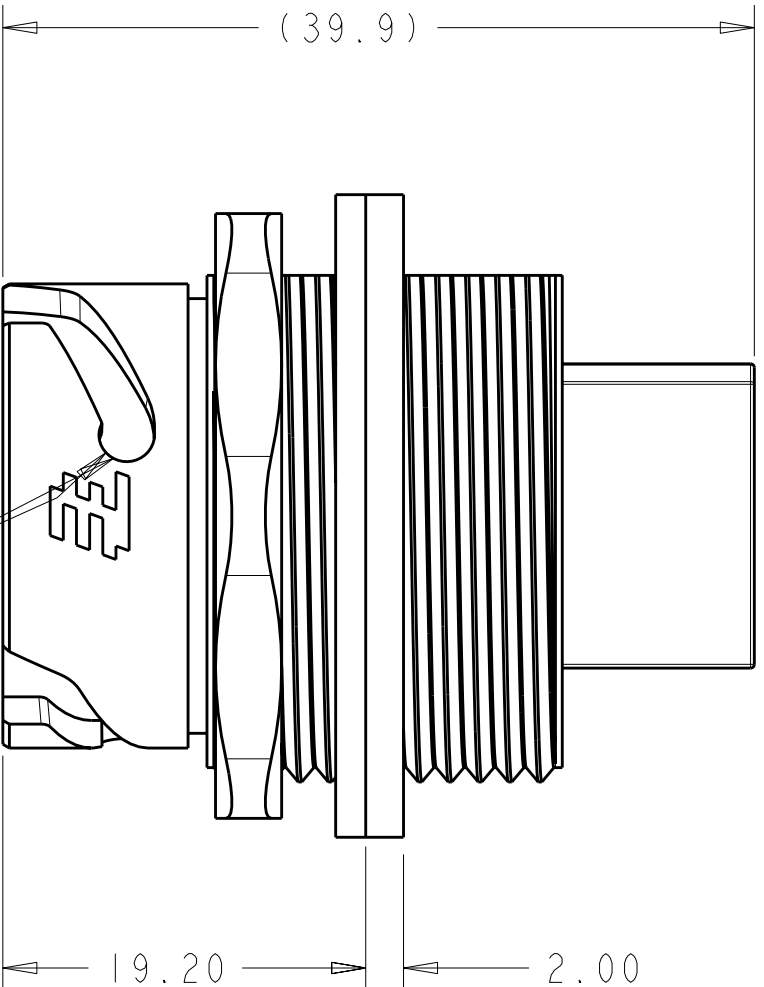

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN RAGHU03OCT06		Tyco Electronics Harrisburg, PA 17105-3608							
				CHK J. LANDIS03OCT06									
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -		NAME		RECEPTACLE KIT, SERIES B TO SERIES A CIRCULAR SEALED USB CONNECTOR					
mm				PRODUCT SPEC									
		0 PLC ±0.3		108-2318									
		1 PLC ±0.2		APPLICATION SPEC									
		2 PLC ±0.10		114-13211		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		3 PLC ±-				A2		00779		C=1954646			
		4 PLC ±-											
MATERIAL		FINISH		WEIGHT									
-				-		CUSTOMER DRAWING		SCALE		SHEET		OF	
								5:2		1		REV	
												A	