

D32P - D60P

V_{BR} : 32 - 60 Volts

FEATURES :


- * High current capability
- * High reliability
- * Low leakage current
- * Low power dissipation
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : DO-41 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.339 gram

BI-DIRECTIONAL TRIGGER DIACS

DO - 41

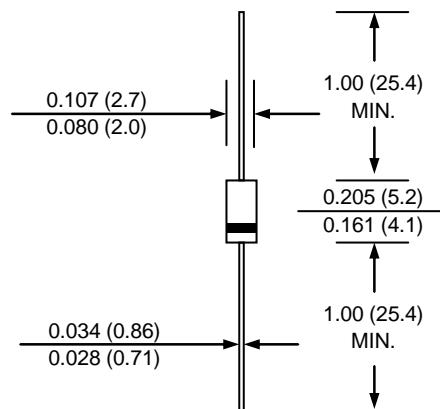

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

RATING	SYMBOL	D32P	D35P	D40P	D50P	D60P	UNIT
Minimum Breakover Voltage	V _{BR} (Min.)	27	30	35	42	50	Volts
Typical Breakover Voltage	V _{BR} (Typ.)	32	35	40	50	60	Volts
Maximum Breakover Voltage	V _{BR} (Max.)	37	40	45	58	70	Volts
Peak Pulse Current (Note 1)	I _{TRM}		2.0		1.6		Amps.
Maximum Breakover Voltage Symmetry	[V _{(BR)1}] - [V _{(BR)2}]		3.0		4.0		Volts
Minimum Dynamic Breakback Voltage	ΔV ±		5.0		8.0	10	Volts
Maximum Breakover Current	I _{(BR)1} & I _{(BR)2}			100			µA
Power Dissipation @ Ta = 50°C	P _D		300				mW
Maximum Leakage Current	I _B		10				µA
Junction Temperature Range	T _J		- 40 to + 100				°C
Storage Temperature Range	T _{STG}		- 40 to + 125				°C

Note :

(1) For 10µs @ 120Hz repetition rate Ta ≤ 40°C