


Heavy Duty Security Proximity Sensor
Part Number: PRA-SP-050K N/O Contacts & Supervisory Loop
Product Data Sheet (Suggested Magnet PRM-SP-020 or PRM-SP-021)

PICTURE



✓ **RoHS Compliant**

DIMENSIONS

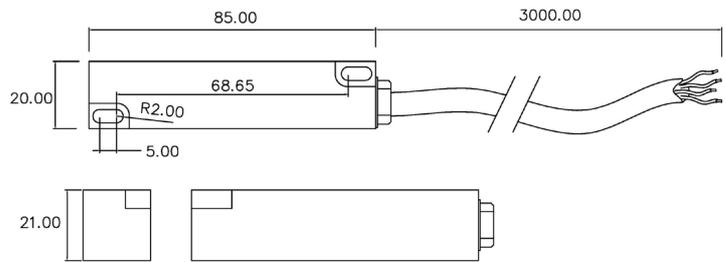

Drawings not to scale
 All dimensions in mm nominal

SPECIFICATION

| | | |
|---------------------------|---|--------------|
| Contact Form / Style | Normally Open | |
| Supervisory Security loop | Yes | |
| Switching Voltage | Max Volts DC/AC | 400 |
| Switching Capacity | Max W/VA | 60 |
| Switching Current | Max Amps | 1.0 |
| Carry Current | Max Amps | 2.0 |
| Insulation Resistance | Max MOhms | 100 |
| Contact Resistance | Max mOhms | 100 |
| Operating Temperature | Celsius | - 40° to 85° |
| Case Material | Nylon 66 | - 40° to 85° |
| Cable | 4 Core 0.5mm PVC insulated Blue, Red, Yellow, Green | |

Applications Include

- Security Doors .
- Automatic Gates
- Barriers.
- Alarm Systems.

Options

- Normally closed & change over versions available.
- Armour cable option.
- Custom cable types, cable lengths, connectors or crimp terminals available.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

Did you know we also sell?



| Rev. No. | Revision Note | Date | Signature |
|----------|---------------|----------|-----------|
| 1 | Datasheet | 10-10-19 | BR |



ISO 9001:2008
 Certificate No. FM21080

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236

www.comus-intl.com

Fax: +44 (0)1255 862014

©2016 Copyright Comus Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.
 USA: Comus International: +1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400