


Similar to picture

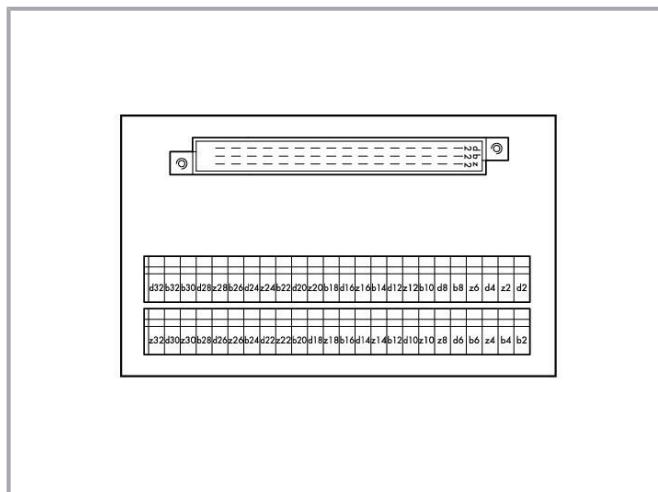

Data

Electrical data

Operating voltage	≤30 VAC; ≤50 VDC
Nominal current	4 A
Contact resistance (max.)	16 mΩ

Safety and protection

Rated voltage	50 V
Rated surge voltage	1.5 kV
Pollution degree	2
Protection type	IP00; Notice! Live parts can be easily touched! Protection against direct contact must be provided by the equipment manufacturer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be observed for each individual application.

Subject to changes. Please also observe the further product documentation!

Connection data

Performance level	1 / 500 mating cycles
-------------------	-----------------------

Connection 1

Connector	Pluggable connector per DIN 41612; Type F; Male connector
Pole number 1	48
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical
For mating connector	Harting
Connection type	Pluggable Connector per DIN 41612

Connection 2

Design 2	PCB terminal blocks (double-row)
Pole number 2	48
Connection type 2	Field
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 236 Series
Solid conductor 2	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length 2	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	128 mm / 5.039 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	39 mm / 1.535 inches

Mechanical Data

Mounting type	DIN-35 rail
Housing design	PCB with mounting feet

Material Data

Contact material (connector)	Copper alloy; gold plated
Fire load	1.598 MJ
Weight	140.9 g

Subject to changes. Please also observe the further product documentation!

Environmental requirements

Relative humidity	85% (non-condensing)
-------------------	----------------------

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 8.0	EC002780
ETIM 7.0	EC002780
PU (SPU)	3 (1) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454432829
Customs tariff number	85366990990

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	7b7d912b-f443-4c5b-82ba-8a46e3547f4d
SCIP notification number (Belgium)	faf975f6-24ff-4397-a609-b8c26dc29f80
SCIP notification number (Bulgaria)	a8362302-e96c-4fd0-bb64-e7d1a8629b74
SCIP notification number (Czech Republic)	289c4c75-b3b1-4f88-a29d-aec9c80cde49
SCIP notification number (Denmark)	25f6f79c-9fbf-482f-8597-56556af1d0c3
SCIP notification number (Finland)	22622f05-1bb6-48bd-926e-3542eab493ec
SCIP notification number (France)	9275b0a6-46ee-4bbf-9b71-73c0391c6cd3
SCIP notification number (Germany)	74135dfb-3e3d-4247-8103-5f7596266082
SCIP notification number (Hungary)	55886a55-ce19-48ed-9b1f-4d71601ac192
SCIP notification number (Italy)	b7ad57bb-1847-428d-9c51-b70896c72ec1
SCIP notification number (Netherlands)	289cf0-3284-44b1-b045-d71989bfec69
SCIP notification number (Poland)	9a2d4b44-0f5c-4a7c-8cb6-9956ba366005
SCIP notification number (Romania)	20798123-ffeb-42d9-906d-57bcabdd2666
SCIP notification number (Sweden)	a80010b1-088e-4c23-8e60-dc1d5c1b3d9e

Subject to changes. Please also observe the further product documentation!

Optional accessories

Marking accessories

Marking strip



Item no.: 709-196

Marking strips; for laser printer; translucent

www.wago.com/709-196



Item no.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

www.wago.com/709-178



Item no.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent

www.wago.com/709-177

Downloads

Documentation

Bid Text

289-436	2019 Feb 19	xml	Download
X81 - Datei		3.5 kB	
289-436	2015 Feb 9	doc	Download
doc - Datei		26.6 kB	

Instruction Leaflet

		pdf	Download
		1.3 MB	

Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

CAD/CAE-Data

CAE data

WSCAD Universe 289-436	URL	Download
EPLAN Data Portal 289-436	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-436


[URL](#)

[Download](#)


Interface module; Pluggable connector per DIN 41612; 48-pole; Harting mating connector; PCB terminal blocks, double-row; in mounting carrier; 2,50 mm²

Installation Notes

Conductor termination

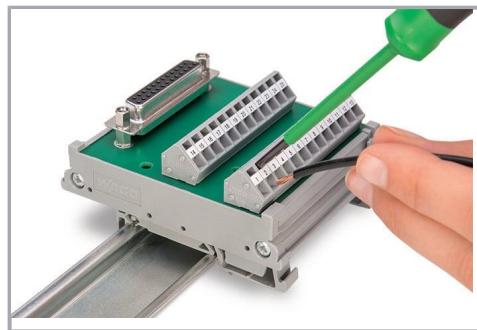

Conductor termination – screwdriver actuation parallel to conductor entry

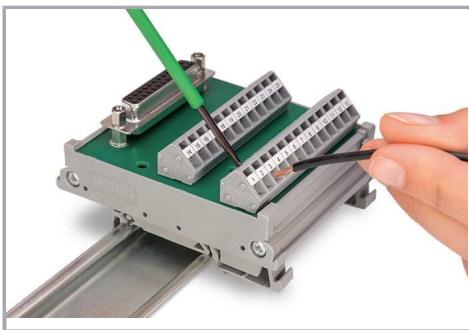

Conductor termination – screwdriver actuation perpendicular to conductor entry

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.