

HIS COPY IS PROVIDED ON A	A RESTRICTED BASIS AND IS NOT TO BE U	ISED IN ANY WAY	DETRIMEN	TAL TO	THE INTERESTS (OF PANDUIT CORP.
Material	High Conductivity Seamless Copper Tube					
Plating	Electro-Tin					
Wire Size	10 AWG					
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	<u> </u>				
Wire Strip Length	7/16 in.	.42±.04		${\longrightarrow}$	01-4-10	(+)
Stud Size	1/4 in.				·	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.25±.04 -	-	-	— 1.00±.02 –	
UL Temperature Rating	90° C		4		2	.16±.06 ———
C.S.A Certified Wire Connector	Yes					
Panduit Color Code on Barrel	N/A					
Panduit Die Index No. on Barrel	N/A		V	Vire insr	pection windo	w ——
Alternate Industry Die Index No. () on Barrel	N/A	_	<u> </u>			





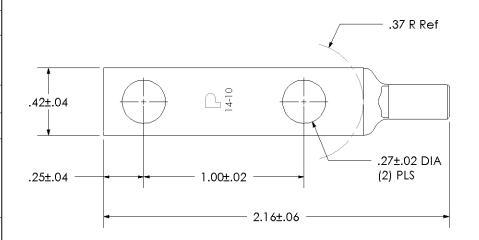

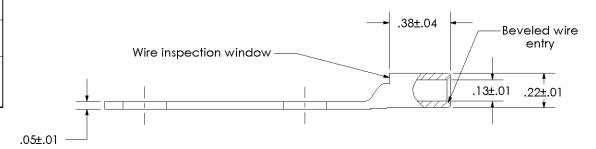

						CORP. TINLEY PARK, ILLINOIS
						LCD10-14D-L
00	12/02	SAB	DRL	RELEASED	10343	Copper Lug - Two-Hole, Standard Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE DRAWING NO / CAD FILE LCD10-14D-CUST