1-of-8 Decoder/ Demultiplexer

High-Performance Silicon-Gate CMOS

The 74HC138 is identical in pinout to the LS138. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs.

The HC138 decodes a three-bit Address to one-of-eight active-low outputs. This device features three Chip Select inputs, two active-low and one active-high to facilitate the demultiplexing, cascading, and chip-selecting functions. The demultiplexing function is accomplished by using the Address inputs to select the desired device output; one of the Chip Selects is used as a data input while the other Chip Selects are held in their active states.

Features

- Output Drive Capability: 10 LSTTL Loads
- Outputs Directly Interface to CMOS, NMOS and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1.0 μA
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance with the Requirements Defined by JEDEC Standard No. 7A
- ESD Performance: HBM > 2000 V; Machine Model > 200 V
- Chip Complexity: 100 FETs or 29 Equivalent Gates
- These are Pb-Free Devices




ON Semiconductor®

http://onsemi.com

MARKING DIAGRAMS



SOIC-16 D SUFFIX CASE 751B





1

TSSOP-16 DT SUFFIX CASE 948F



HC138 = Device Code

A = Assembly Location

L, WL = Wafer Lot
Y = Year
W, WW = Work Week
G or ■ = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.




Figure 1. Pin Assignment

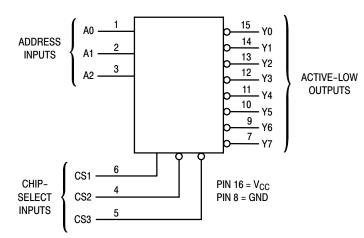


Figure 2. Logic Diagram

FUNCTION TABLE

| | Inputs | | | | | | | | Ou | tput | s | | |
|----|--------|-----|----|------------|----|----|------------|----|-----------|-----------|----|----|------------|
| CS | 1CS2 | CS3 | A2 | A 1 | Α0 | Y0 | Y 1 | Y2 | Y3 | Y4 | Y5 | Y6 | Y 7 |
| Х | Χ | Η | Χ | Χ | Χ | Н | Н | Н | Н | Н | Н | Н | Н |
| Х | Н | Χ | Х | Χ | Χ | Н | Н | Н | Н | Н | Н | Н | Н |
| L | Χ | Χ | Χ | Χ | Χ | Н | Н | Н | Н | Н | Н | Н | Н |
| Н | L | L | L | L | L | L | Н | Н | Н | Н | Н | Н | Н |
| Н | L | L | L | L | Н | Н | L | Н | Н | Н | Н | Н | Н |
| Н | L | L | L | Н | L | Н | Н | L | Н | Н | Н | Н | Н |
| Н | L | L | L | Н | Н | Н | Н | Н | L | Н | Н | Н | Н |
| Н | L | Г | Н | L | L | Н | Н | Н | Н | L | Н | Н | Н |
| Н | L | L | Н | L | Н | Н | Н | Н | Н | Н | L | Н | Н |
| Н | L | L | Н | Н | L | Н | Н | Н | Н | Н | Н | L | Н |
| Н | L | L | Н | Н | Н | Н | Н | Н | Н | Н | Н | Н | L |

H = high level (steady state); L = low level (steady state); X = don't care

ORDERING INFORMATION

| Device | Package | Shipping [†] |
|--------------|----------------------|-----------------------|
| 74HC138DR2G | SOIC-16 (Pb-Free) | 2500 / Tape & Reel |
| 74HC138DTR2G | TSSOP-16* | 2500 / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{*}This package is inherently Pb-Free.

MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|------------------|--|--------------------------------|------|
| V _{CC} | DC Supply Voltage (Referenced to GND) | - 0.5 to + 7.0 | V |
| V _{in} | DC Input Voltage (Referenced to GND) | - 0.5 to V _{CC} + 0.5 | V |
| V _{out} | DC Output Voltage (Referenced to GND) | - 0.5 to V _{CC} + 0.5 | V |
| I _{in} | DC Input Current, per Pin | ±20 | mA |
| l _{out} | DC Output Current, per Pin | ±25 | mA |
| I _{CC} | DC Supply Current, V _{CC} and GND Pins | ±50 | mA |
| P _D | Power Dissipation in Still Air, SOIC Package† TSSOP Package† | 500 450 | mW |
| T _{stg} | Storage Temperature | - 65 to + 150 | °C |
| TL | Lead Temperature, 1 mm from Case for 10 Seconds (SOIC or TSSOP Package) | 260 | °C |

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high–impedance circuit. For proper operation, V_{in} and V_{out} should be constrained to the range GND \leq (V_{in} or V_{out}) \leq V_{CC} .

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

†Derating - SOIC Package: $-7 \text{ mW/}^{\circ}\text{C}$ from 65° to 125°C

TSSOP Package: - 6.1 .W/°C from 65° to 125°C

For high frequency or heavy load considerations, see Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Min | Max | Unit | |
|------------------------------------|---|--|-------------|--------------------|----|
| V _{CC} | DC Supply Voltage (Referenced to GND) | | | 6.0 | V |
| V _{in} , V _{out} | DC Input Voltage, Output Voltage (Reference | OC Input Voltage, Output Voltage (Referenced to GND) | | | V |
| T _A | Operating Temperature, All Package Type | – 55 | + 125 | °C | |
| t _r , t _f | (Figure 2) | CC = 2.0 V CC = 4.5 V CC = 6.0 V | 0 0 0 | 1000 500 400 | ns |

DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

| | | | v_{cc} | Guara | nteed Limit | 1 | |
|-----------------|---|---|--------------------------|---------------------------|---------------------------|---------------------------|----------|
| Symbol | Parameter | Test Conditions | (V) | -55°C to 25°C | ≤ 85°C | ≤ 125°C | Unit |
| V _{IH} | Minimum High-Level Input Voltage | $V_{out} = 0.1 \text{ V or } V_{CC} - 0.1 \text{ V}$ $ I_{out} \le 20 \mu\text{A}$ | 2.0 3.0 4.5 6.0 | 1.5 2.1 3.15 4.2 | 1.5 2.1 3.15 4.2 | 1.5 2.1 3.15 4.2 | V |
| V _{IL} | Maximum Low-Level Input Voltage | V_{out} = 0.1 V or V_{CC} – 0.1 V $ I_{out} \le 20 \mu A$ | 2.0 3.0 4.5 6.0 | 0.5 0.9 1.35 1.8 | 0.5 0.9 1.35 1.8 | 0.5 0.9 1.35 1.8 | V |
| V _{OH} | Minimum High-Level Output Voltage | $V_{in} = V_{IH} \text{ or } V_{IL}$ $ I_{out} \le 20 \ \mu\text{A}$ | 2.0 4.5 6.0 | 1.9 4.4 5.9 | 1.9 4.4 5.9 | 1.9 4.4 5.9 | V |
| | | $\begin{split} V_{in} = V_{IH} \text{ or } V_{IL} \ \left I_{out} \right & \leq \ 2.4 \text{ mA} \\ \left I_{out} \right & \leq \ 4.0 \text{ mA} \\ \left I_{out} \right & \leq \ 5.2 \text{ mA} \end{split}$ | 3.0 4.5 6.0 | 2.48 3.98 5.48 | 2.34 3.84 5.34 | 2.20 3.70 5.20 | |
| V _{OL} | Maximum Low-Level Output Voltage | $V_{in} = V_{IH} \text{ or } V_{IL}$ $ I_{out} \le 20 \mu\text{A}$ | 2.0 4.5 6.0 | 0.1 0.1 0.1 | 0.1 0.1 0.1 | 0.1 0.1 0.1 | V |
| | | $\begin{aligned} V_{in} = V_{IH} \text{ or } V_{IL} \ I_{out} &\leq 2.4 \text{ mA} \\ I_{out} &\leq 4.0 \text{ mA} \\ I_{out} &\leq 5.2 \text{ mA} \end{aligned}$ | 3.0 4.5 6.0 | 0.26 0.26 0.26 | 0.33 0.33 0.33 | 0.40 0.40 0.40 | |
| I _{in} | Maximum Input Leakage Current | V _{in} = V _{CC} or GND | 6.0 | ±0.1 | ±1.0 | ±1.0 | μΑ |
| Icc | Maximum Quiescent Supply Current (per Package) | $V_{in} = V_{CC}$ or GND $I_{out} = 0 \mu A$ | 6.0 | 4 | 40 | 40 | μΑ |

NOTE: Information on typical parametric values can be found in Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).

AC ELECTRICAL CHARACTERISTICS (C_L = 50 pF, Input t_r = t_f = 6.0 ns)

| | | V _{CC} | Guara | | | |
|--------------------|---|-----------------|---------------|------------------------|---------|------|
| Symbol | Parameter | (V) | -55°C to 25°C | ≤ 85 ° C | ≤ 125°C | Unit |
| t _{PLH} , | Maximum Propagation Delay, Input A to Output Y | 2.0 | 135 | 170 | 205 | ns |
| t _{PHL} | (Figures 1 and 4) | 3.0 | 90 | 125 | 165 | |
| | | 4.5 | 27 | 34 | 41 | |
| | | 6.0 | 23 | 29 | 35 | |
| t _{PLH} , | Maximum Propagation Delay, CS1 to Output Y | 2.0 | 110 | 140 | 165 | ns |
| t _{PHL} | (Figures 2 and 4) | 3.0 | 85 | 100 | 125 | |
| | | 4.5 | 22 | 28 | 33 | |
| | | 6.0 | 19 | 24 | 28 | |
| t _{PLH} , | Maximum Propagation Delay, CS2 or CS3 to Output Y | 2.0 | 120 | 150 | 180 | ns |
| t _{PHL} | (Figures 3 and 4) | 3.0 | 90 | 120 | 150 | |
| | | 4.5 | 24 | 30 | 36 | |
| | | 6.0 | 20 | 26 | 31 | |
| t _{TLH} , | Maximum Output Transition Time, Any Output | 2.0 | 75 | 95 | 110 | ns |
| t _{THL} | (Figures 2 and 4) | 3.0 | 30 | 40 | 55 | |
| | | 4.5 | 15 | 19 | 22 | |
| | | 6.0 | 13 | 16 | 19 | |
| C _{in} | Maximum Input Capacitance | - | 10 | 10 | 10 | pF |

NOTE: For propagation delays with loads other than 50 pF, and information on typical parametric values, see Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).

| | | Typical @ 25°C, V _{CC} = 5.0 V | |
|----------|--|---|----|
| C_{PD} | Power Dissipation Capacitance (Per Package)* | 55 | pF |

^{*} Used to determine the no-load dynamic power consumption: $P_D = C_{PD} \, V_{CC}^2 f + I_{CC} \, V_{CC}$. For load considerations, see Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).

SWITCHING WAVEFORMS

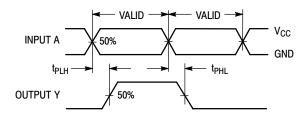


Figure 1.

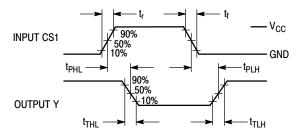


Figure 2.


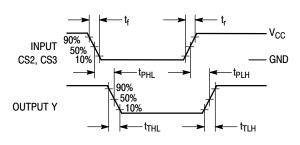


Figure 3.



*Includes all probe and jig capacitance

Figure 4. Test Circuit

PIN DESCRIPTIONS

ADDRESS INPUTS A0, A1, A2 (Pins 1, 2, 3)

Address inputs. These inputs, when the chip is selected, determine which of the eight outputs is active–low.

CONTROL INPUTS CS1, CS2, CS3 (Pins 6, 4, 5)

Chip select inputs. For CS1 at a high level and CS2, CS3 at a low level, the chip is selected and the outputs follow the


Address inputs. For any other combination of CS1, CS2, and CS3, the outputs are at a logic high.

OUTPUTS

Y0 - Y7 (Pins 15, 14, 13, 12, 11, 10, 9, 7)


Active-low Decoded outputs. These outputs assume a low level when addressed and the chip is selected. These outputs remain high when not addressed or the chip is not selected.

EXPANDED LOGIC DIAGRAM

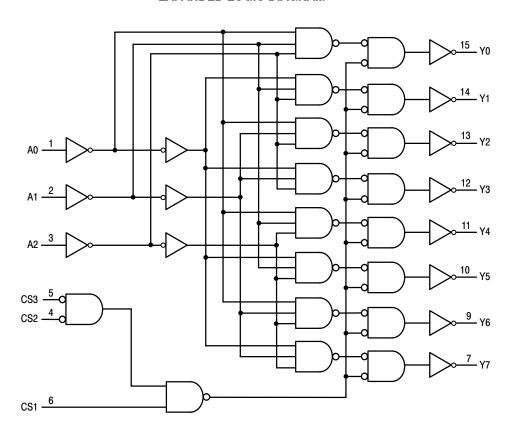

PACKAGE DIMENSIONS


SOIC-16 CASE 751B-05 ISSUE K

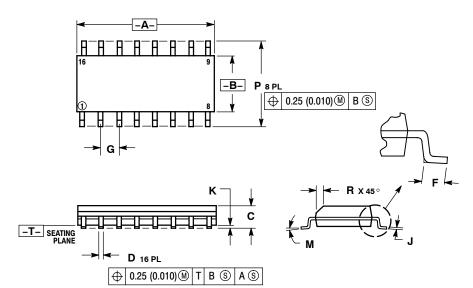

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION. SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| | MILLIN | IETERS | INC | HES |
|-----|--------|--------|-----------|-------|
| DIM | MIN | MAX | MIN | MAX |
| Α | 9.80 | 10.00 | 0.386 | 0.393 |
| В | 3.80 | 4.00 | 0.150 | 0.157 |
| С | 1.35 | 1.75 | 0.054 | 0.068 |
| D | 0.35 | 0.49 | 0.014 | 0.019 |
| F | 0.40 | 1.25 | 0.016 | 0.049 |
| G | 1.27 | BSC | 0.050 BSC | |
| J | 0.19 | 0.25 | 0.008 | 0.009 |
| K | 0.10 | 0.25 | 0.004 | 0.009 |
| M | 0° | 7° | 0° | 7° |
| P | 5.80 | 6.20 | 0.229 | 0.244 |
| R | 0.25 | 0.50 | 0.010 | 0.019 |

SOLDERING FOOTPRINT*




DIMENSIONS: MILLIMETERS

^{*}For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

TSSOP-16 CASE 948F-01 ISSUE B

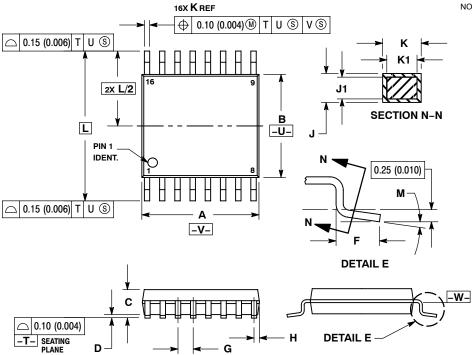

- NOTES:

 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

 2. CONTROLLING DIMENSION: MILLIMETER.

 3. DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.


 4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.

 5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION. SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K
 - (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL
 - CONDITION.
 6. TERMINAL NUMBERS ARE SHOWN FOR
 - REFERENCE ONLY.

 7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| | MILLIN | IETERS | INC | HES | |
|-----|----------|--------|-----------|-------|--|
| DIM | MIN | MAX | MIN | MAX | |
| Α | 4.90 | 5.10 | 0.193 | 0.200 | |
| В | 4.30 | 4.50 | 0.169 | 0.177 | |
| С | | 1.20 | | 0.047 | |
| D | 0.05 | 0.15 | 0.002 | 0.006 | |
| F | 0.50 | 0.75 | 0.020 | 0.030 | |
| G | 0.65 | BSC | 0.026 BSC | | |
| Н | 0.18 | 0.28 | 0.007 | 0.011 | |
| J | 0.09 | 0.20 | 0.004 | 0.008 | |
| J1 | 0.09 | 0.16 | 0.004 | 0.006 | |
| Κ | 0.19 | 0.30 | 0.007 | 0.012 | |
| K1 | 0.19 | 0.25 | 0.007 | 0.010 | |
| L | 6.40 BSC | | 0.252 | BSC | |
| M | 0° | 8° | 0° | 8 ° | |

SOLDERING FOOTPRINT*

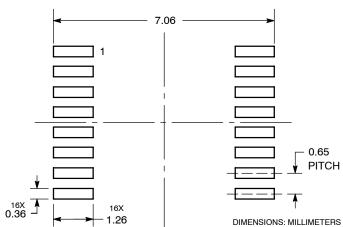

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and un are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative