

## FEATURES

- Maximum Offset Voltage: 1mV
- Maximum Bias Current: 15nA
- Typical Output Drive: 70mA
- Operates from 1.1V to 40V
- Internal Pull-Up Current
- Output Can Drive Loads Above V<sup>+</sup>
- 30µA Supply Current (LT1017)  
110µA Supply Current (LT1018)
- Available in 8-Lead PDIP, 8-Lead Plastic SO, and  
16-Lead Plastic SO Packages

## APPLICATIONS

- Power Supply Monitors
- Relay Driving
- Oscillators

**L**T, LT, LTC and LTM are registered trademarks of Linear Technology Corporation.  
All other trademarks are the property of their respective owners.

## DESCRIPTION


The LT®1017/LT1018 are general purpose micropower comparators. The LT1017 is optimized for lowest operating power while the LT1018 operates at higher power and higher speed. Both devices can operate from a single 1.1V cell up to 40V. The output stage includes a class "B" pull-up current source, eliminating the need for an external resistive pull-up and saving power. The output stage is also designed to allow driving loads connected to a supply more positive than the device, as can comparators with open-collector output stages.

Input specifications are also excellent. On-chip trimming minimizes offset voltage, while high gain and common mode rejection ratio keep other input referred errors low. Common mode voltage range includes ground. Special circuitry prevents false output states even if the input is overdriven.


The LT1017/LT1018 are pin compatible with older dual comparators such as 393 type devices.

## TYPICAL APPLICATION

1.5V Powered Refrigerator Alarm

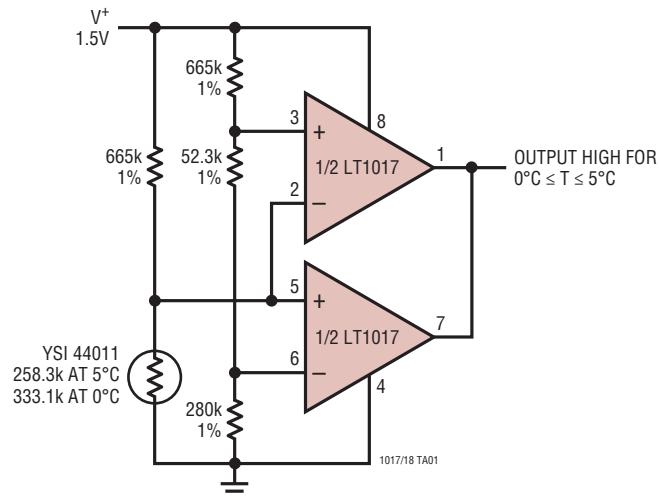

Supply Current

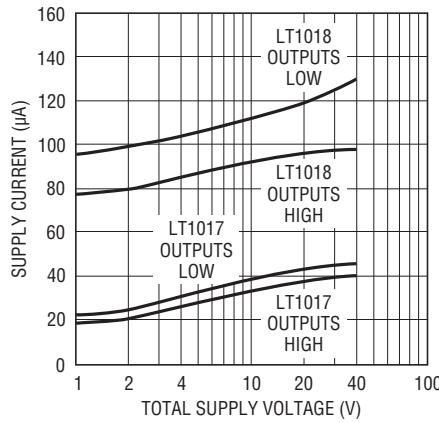

1017/18 TA02





# LT1017/LT1018

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage .....	40V
Differential Input Voltage.....	40V
Input Voltage.....	-0.3V to 40V
Short-Circuit Duration .....	Indefinite
Storage Temperature Range.....	-65°C to 150°C

Operating Temperature Range	
LT1017M/LT1018M.....	-55°C to 125°C
LT1017C/LT1018C.....	0°C to 70°C
LT1017I/LT1018I.....	-40°C to 85°C
Lead Temperature (Soldering, 10 sec) .....	300°C

## PACKAGE/ORDER INFORMATION

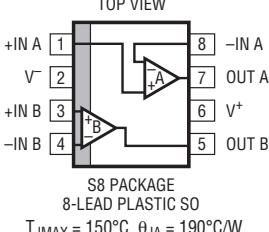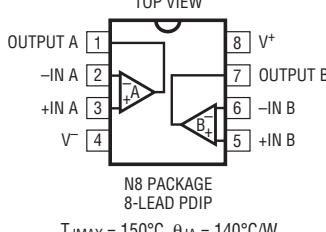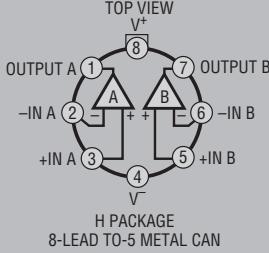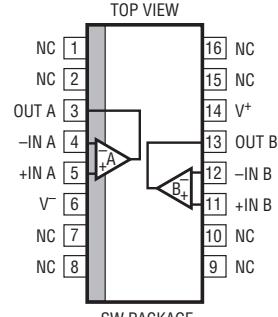TOP VIEW  S8 PACKAGE 8-LEAD PLASTIC SO T <sub>JMAX</sub> = 150°C, θ <sub>JA</sub> = 190°C/W		TOP VIEW  N8 PACKAGE 8-LEAD PDIP T <sub>JMAX</sub> = 150°C, θ <sub>JA</sub> = 140°C/W	
ORDER PART NUMBER	S8 PART MARKING	ORDER PART NUMBER	PART MARKING
LT1017CS8 LT1017IS8 LT1018CS8 LT1018IS8	1017 1017I 1018 1018I	LT1017CN8 LT1017IN8 LT1018CN8	
TOP VIEW  H PACKAGE 8-LEAD TO-5 METAL CAN T <sub>JMAX</sub> = 150°C, θ <sub>JA</sub> = 150°C/W, θ <sub>JG</sub> = 45°C/W		TOP VIEW  SW PACKAGE 16-LEAD PLASTIC SO T <sub>JMAX</sub> = 150°C, θ <sub>JA</sub> = 130°C/W	
OBsolete PACKAGE Consider the 8-Lead Plastic Dip Package For Alternate Source			
ORDER PART NUMBER	PART MARKING	ORDER PART NUMBER	PART MARKING
LT1017MH LT1017CH LT1018MH LT1018CH		LT1017CSW LT1018CSW	
<b>Order Options</b> Tape and Reel: Add #TR Lead Free: Add #PBF Lead Free Tape and Reel: Add #TRPBF Lead Free Part Marking: <a href="http://www.linear.com/leadfree/">http://www.linear.com/leadfree/</a>			

\*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for parts specified with wider operating temperature ranges.

10178ff



**ELECTRICAL CHARACTERISTICS**

The ● denotes the specifications which apply over the full operating temperature range of  $-55^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  for M grade parts,  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  for I grade parts and  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  for C grade parts.


PARAMETER	CONDITIONS	LT1017			LT1018			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
Leakage Current	$V_S = 5\text{V}$ , $V_{\text{OUT}} = 40\text{V}$ $V_{\text{IN}} \geq 100\text{mV}$	25°C ● 125°C	0.5 0.6 5	3 3 5	1 1.8 15	8 10 15	μA μA μA	
Supply Current	$V_S = 5\text{V}$	25°C ● 125°C	30 40 80	60 80 80	110 110 300	250 250 300	μA μA μA	
		25°C ● 125°C	40 55 100	90 100 100	130 140 300	250 270 300	μA μA μA	
	$I_{\text{OUT}} = 1\text{mA}$	25°C ● 125°C		1.15 1.15 1.15		1.2 1.2 1.2	V V V	

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.


**Note 2:** Offset voltage is guaranteed over a common mode voltage range of  $V^- \leq V_{\text{IN}} \leq (V^+ - 0.9\text{V})$ .

**Note 3:** No load gain is guaranteed but not tested (LT1017 only).


## TYPICAL PERFORMANCE CHARACTERISTICS

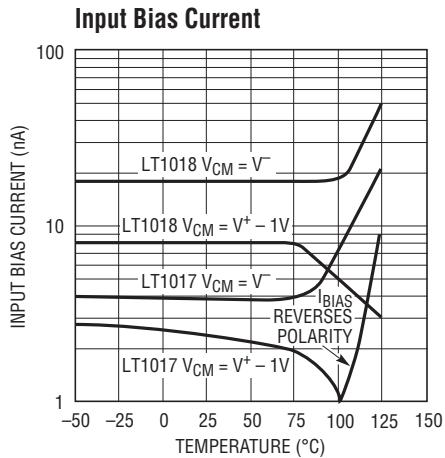


1017/18 G01

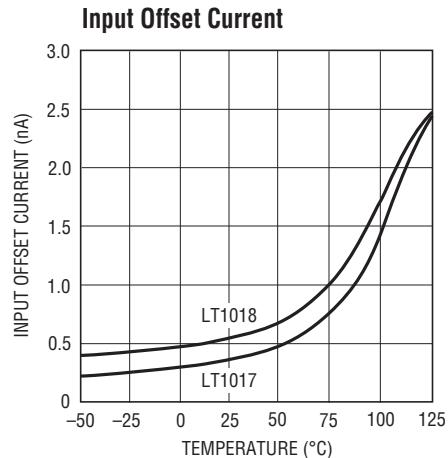


1017/18 G02

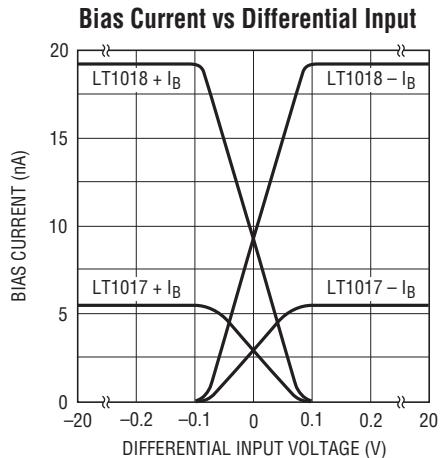


1017/18 G03

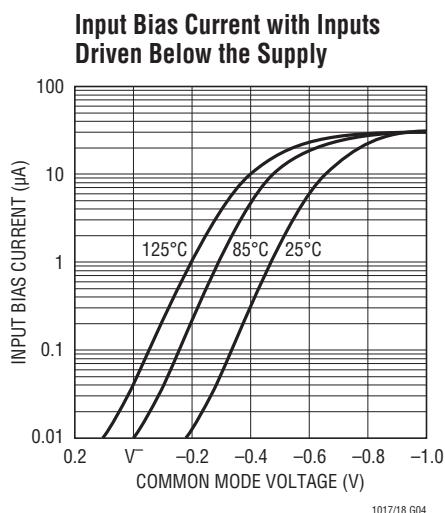


1017/18 G04

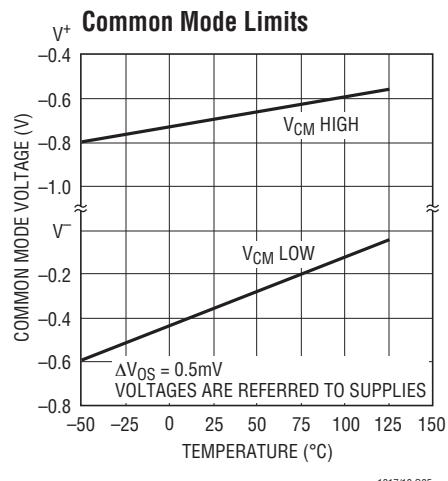


1017/18 G05

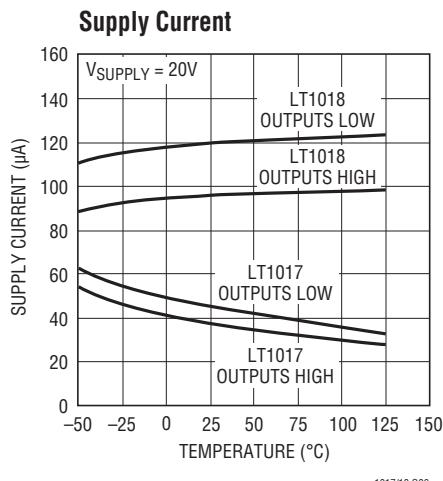


1017/18 G06

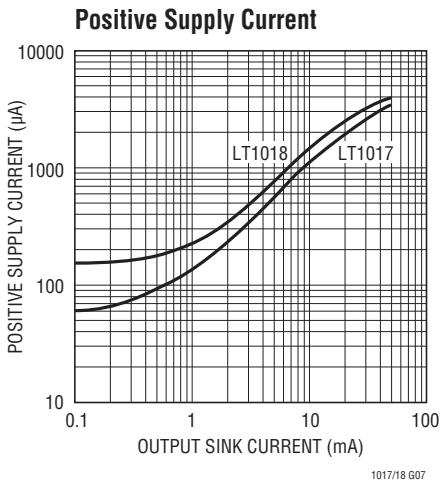

1017/18 G07

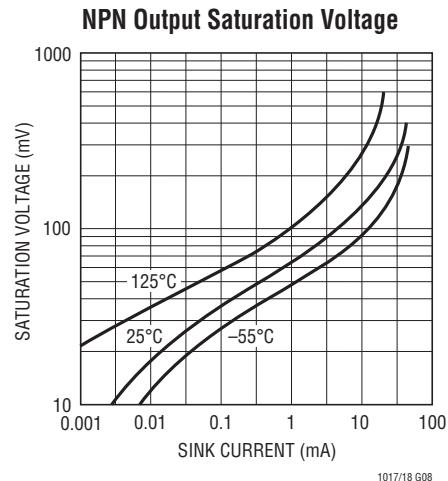

1017/18 G08

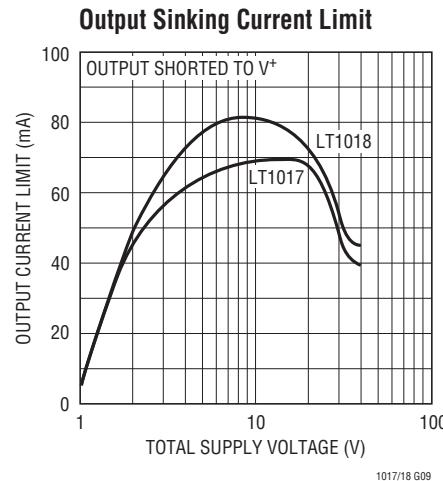


1017/18 G09


# LT1017/LT1018

## TYPICAL PERFORMANCE CHARACTERISTICS


### Output Sinking Current Limit

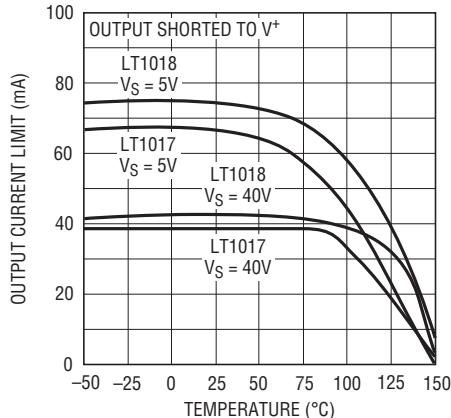


### Total Switching Time

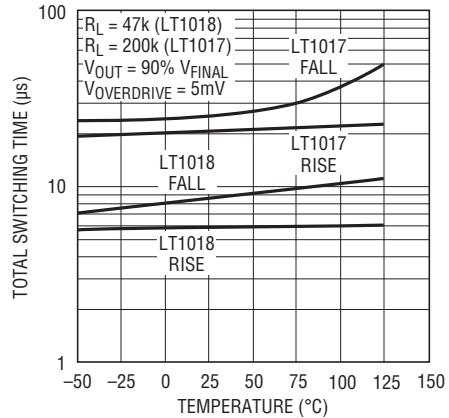


### Output Delay

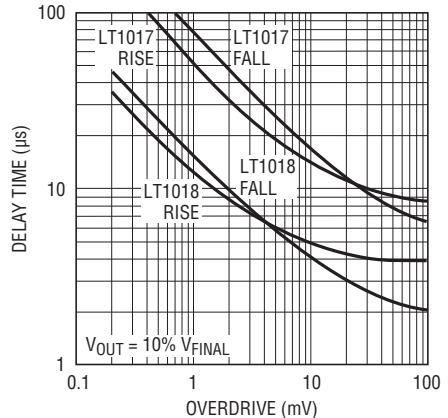


### Transition Time

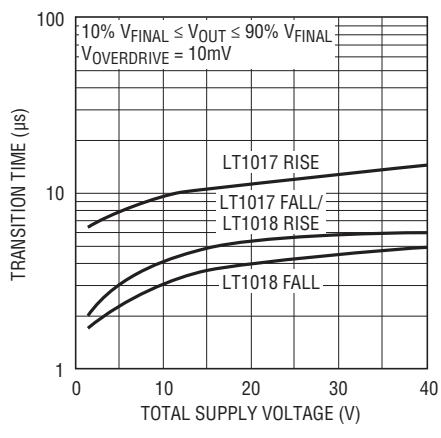


### Positive Transition Time

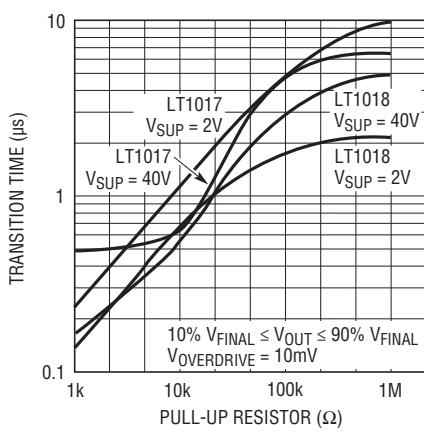


### LT1017 Response Time

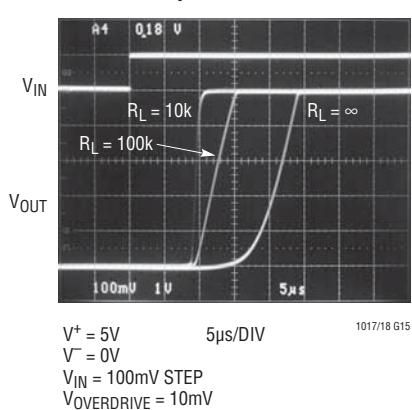


### LT1017 Response Time

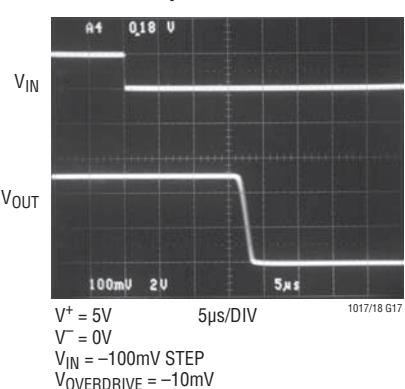

### LT1018 Response Time

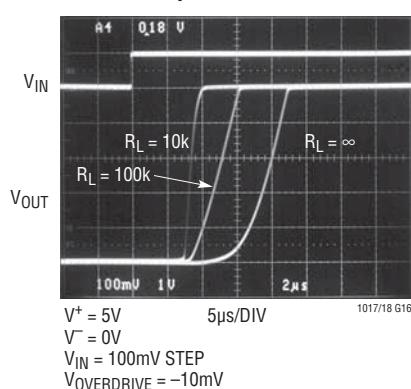


### LT1018 Response Time

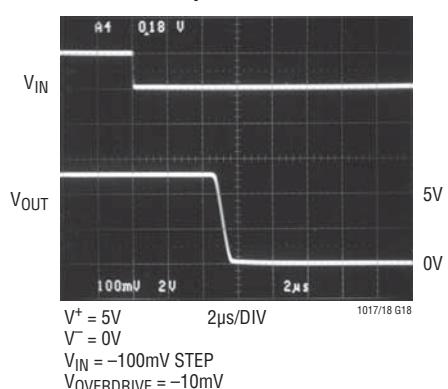


## TYPICAL APPLICATIONS


**Driving Relays**

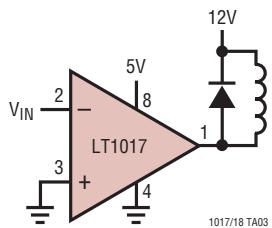


**Increasing Positive Output Current**

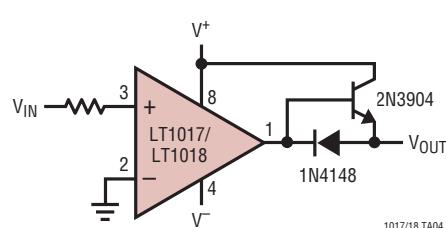


**Delay On Power Up**

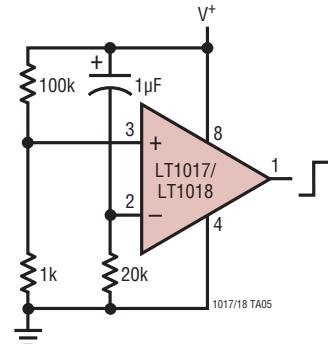

**LT1018 Op Amp,  $A_V = 100$**

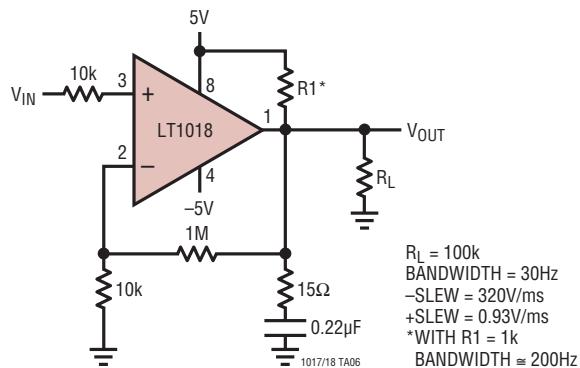


**LT1017 Op Amp,  $A_V = 100$**

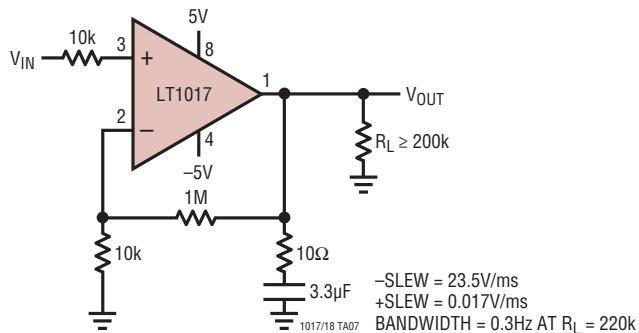


## TYPICAL APPLICATIONS

### Negative Voltage Regulator

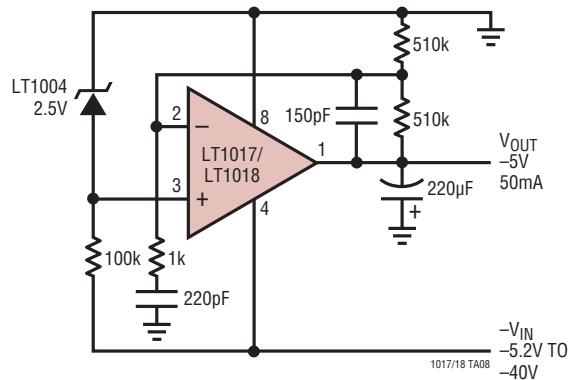


### 2-Wire Comparator

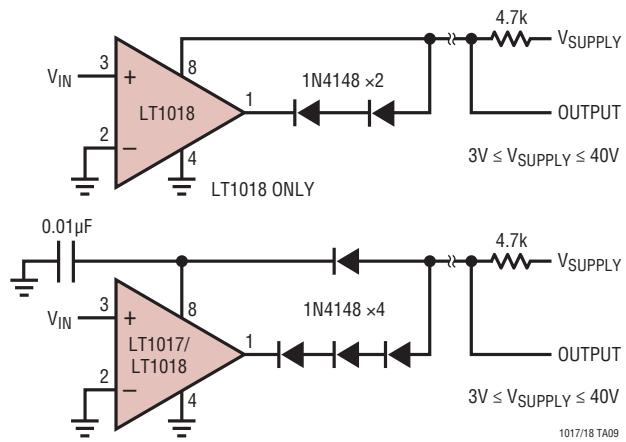


## TYPICAL APPLICATIONS

## 5V Power Supply Monitor

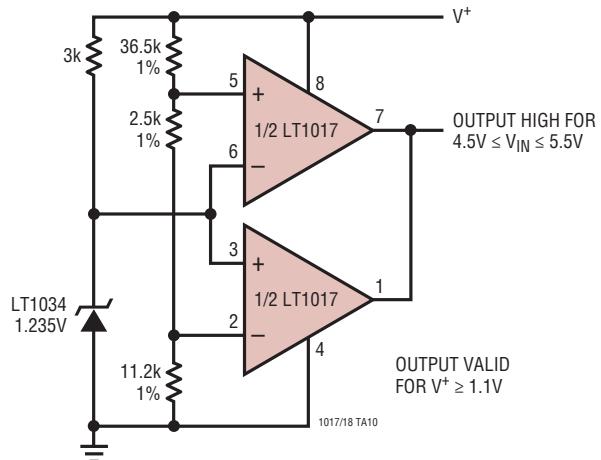


## Precise Tri-Wave Generator

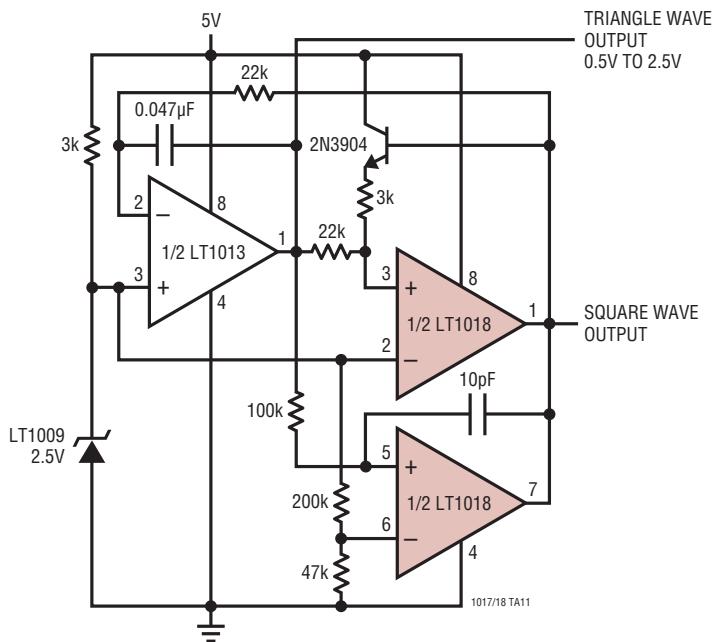


## TYPICAL APPLICATIONS

**Power Supply Monitor**

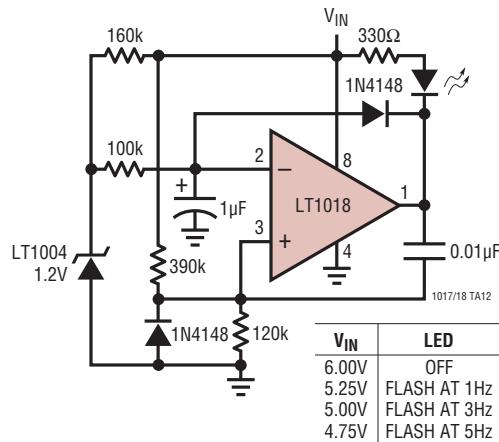


**1.5V Input Flyback Regulator**

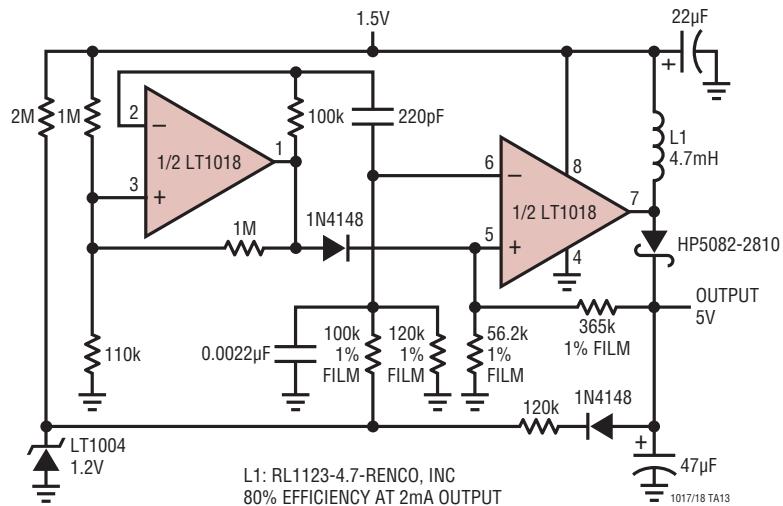


## TYPICAL APPLICATIONS

## Regulated Step-Up Converter

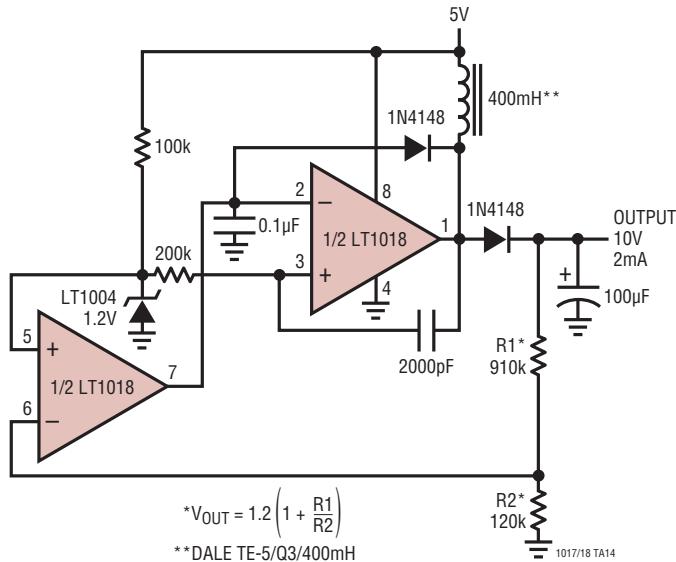


## Low Power\* V-to-F Converter

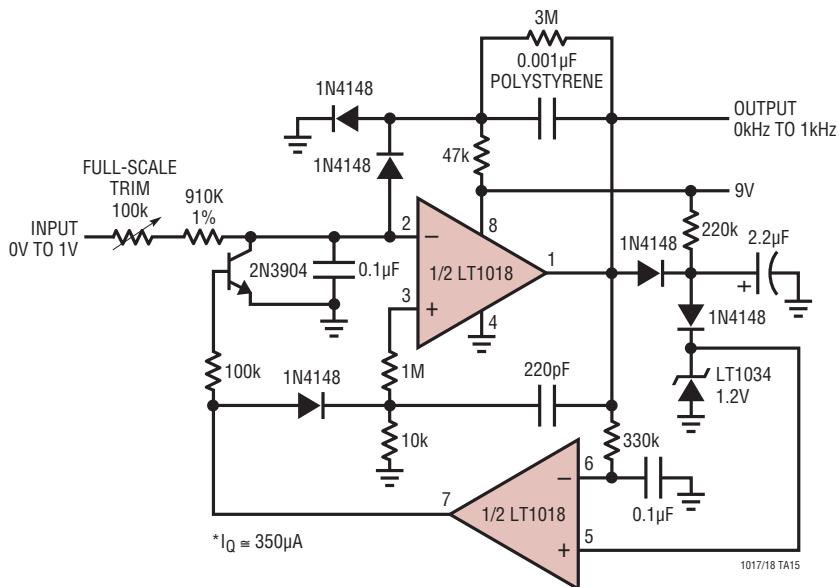

## PACKAGE DESCRIPTION

**H Package**  
**8-Lead TO-5 Metal Can (.200 Inch PCD)**  
 (Reference LTC DWG # 05-08-1320)

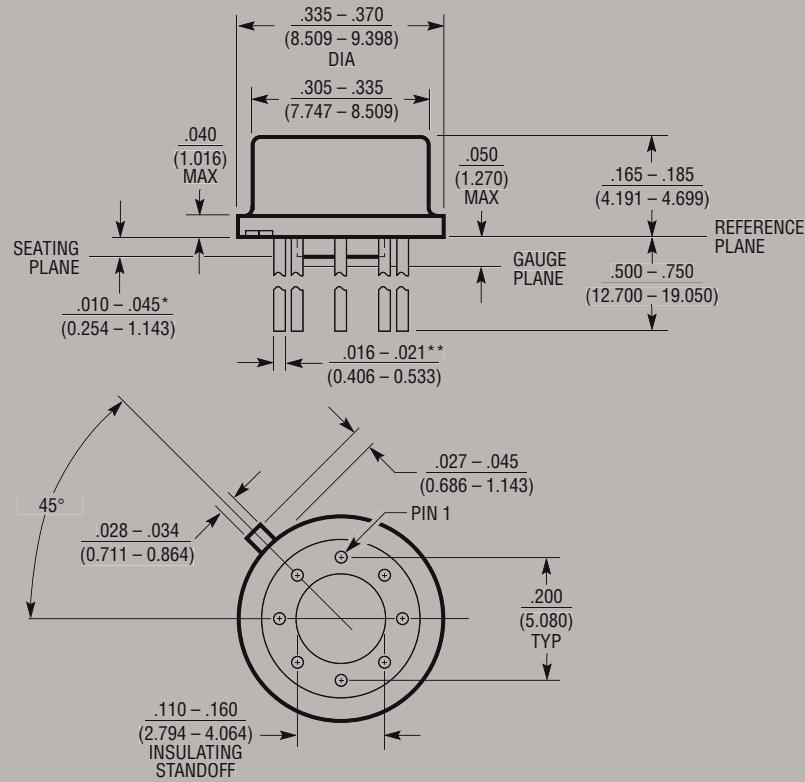


\*LEAD DIAMETER IS UNCONTROLLED BETWEEN THE REFERENCE PLANE AND THE SEATING PLANE

\*\*FOR SOLDER DIP LEAD FINISH, LEAD DIAMETER IS  $\frac{.016 - .024}{(0.406 - 0.610)}$  H8(TO-5) 0.200 PCD 0204

**OBSOLETE PACKAGE**

## PACKAGE DESCRIPTION

**N8 Package**  
**8-Lead PDIP (Narrow .300 Inch)**  
(Reference LTC DWG # 05-08-1510)

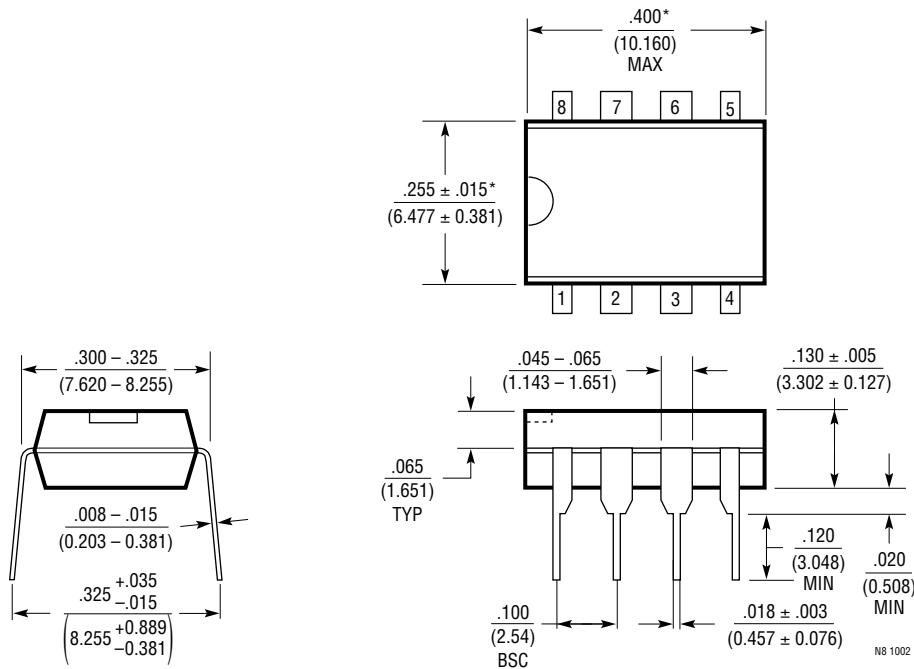


NOTE:

1. DIMENSIONS ARE INCHES  
MILLIMETERS

\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)


## PACKAGE DESCRIPTION

**S8 Package**  
**8-Lead Plastic Small Outline (Narrow .150 Inch)**  
 (Reference LTC DWG # 05-08-1610)

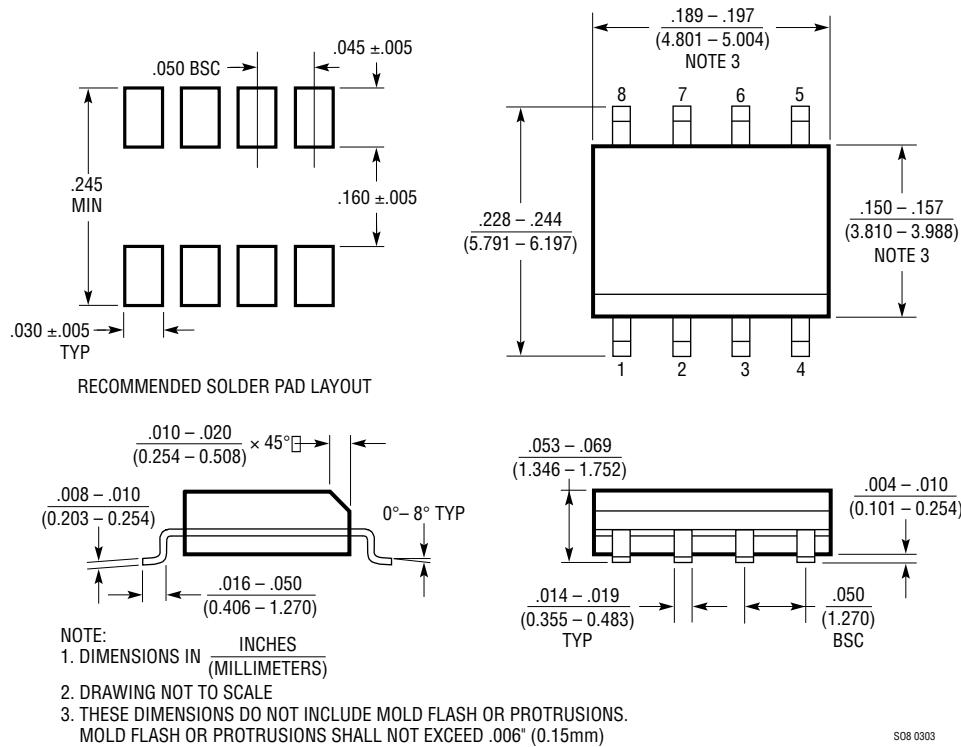

## PACKAGE DESCRIPTION

**SW Package**  
**16-Lead Plastic Small Outline (Wide .300 Inch)**  
(Reference LTC DWG # 05-08-1620)

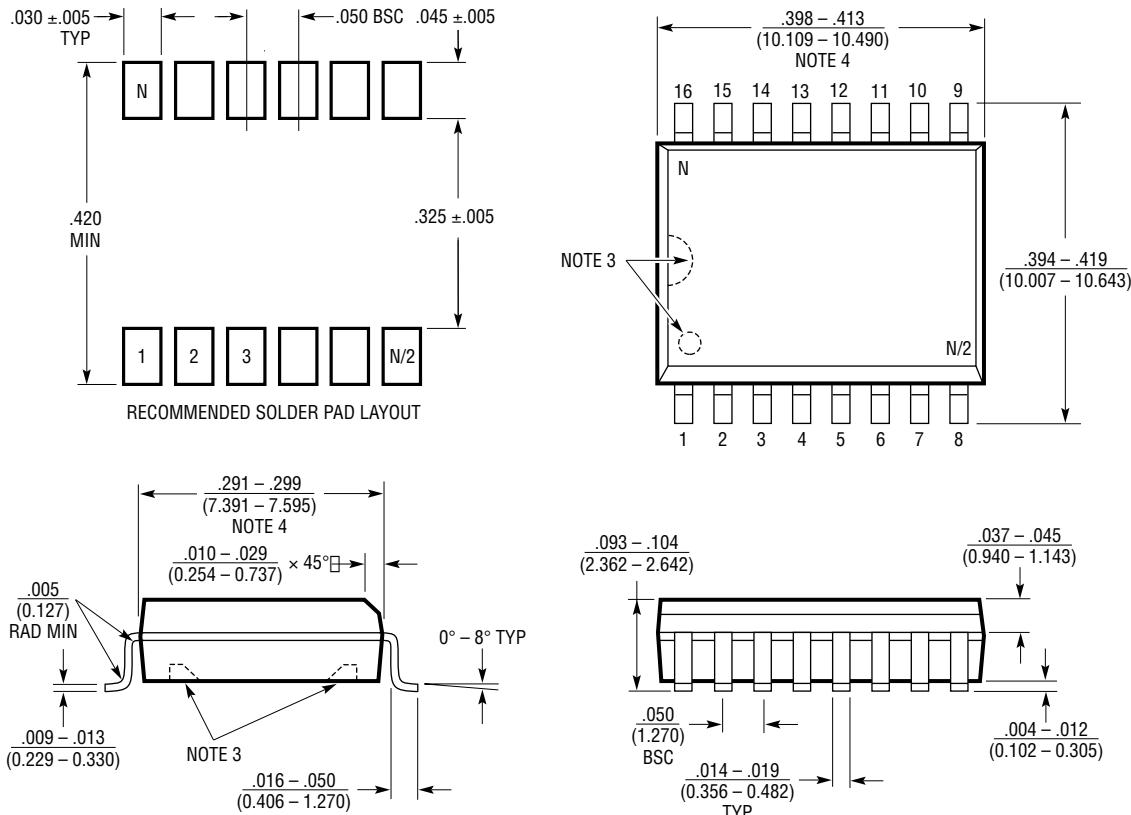


**NOTE:**

1. DIMENSIONS IN INCHES  
(MILLIMETERS)
2. DRAWING NOT TO SCALE
3. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS.  
THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS
4. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)

S16 (WIDE) 0502

## TYPICAL APPLICATION

### Fully Isolated Limit Comparator

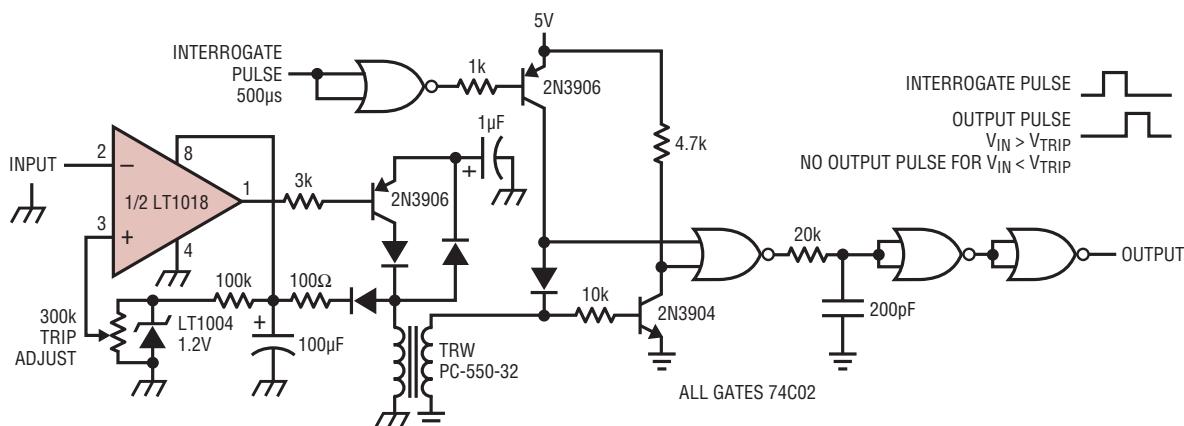

## RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1011/LT1011A	Voltage Comparators	Improved LT111A, 0.5mV $V_{OS(MAX)}$ , 25nA $I_B(MAX)$ , 3nA $I_{OS(MAX)}$ , 250ns $t_{PD(MAX)}$
LT1020	Micropower Regulator and Comparator	40μA $I_{SUPPLY}$ , 125mA $I_{OUT}$ , 2.5V Reference Voltage
LTC1040	Dual Micropower Comparator	1.5μW (1 Sample/Second), 0.5mV $V_{OS(MAX)}$ , Rail-to-Rail Input
LT1120/LT1120A	Micropower Regulator with Comparator and Shutdown	20μA $I_{SUPPLY}$ , 125mA $I_{OUT}$ , 2.5V Reference Voltage
LT319A	Dual Comparators	0.5mV $V_{OS(MAX)}$ , 25mA $I_{OUT}$ , 80ns $t_{PD}$
LT1671	Single Supply Ground Sensing Comparator	450μA $I_{SUPPLY}$ , 60ns $t_{PD}$ , 0.8mV $V_{OS}$
LT1716	Micropower, 44V, SOT-23 Ground Sensing Comparator	Input Common Mode Range Extends from -5V to 44V from Negative Supply