

October 1991 Revised May 2000

# SCAN18540T Inverting Line Driver with 3-STATE Outputs

#### **General Description**

The SCAN18540T is a high speed, low-power line driver featuring separate data inputs organized into dual 9-bit bytes with byte-oriented paired output enable control signals. This device is compliant with IEEE 1149.1 Standard Test Access Port and Boundary Scan Architecture with the incorporation of the defined boundary-scan test logic and test access port consisting of Test Data Input (TDI), Test Data Out (TDO), Test Mode Select (TMS), and Test Clock (TCK).


#### **Features**

- IEEE 1149.1 (JTAG) compliant
- Dual output enable signals per byte
- 3-STATE outputs for bus-oriented applications
- 9-bit data busses for parity applications
- Reduced-swing outputs source 32 mA/sink 64 mA
- Guaranteed to drive 50Ω transmission line to TTL input levels of 0.8V and 2.0V
- TTL compatible inputs
- 25 mil pitch SSOP (Shrink Small Outline Package)
- Includes CLAMP and HIGHZ instructions
- Member of Fairchild's SCAN products

#### **Ordering Code:**

Order Number	Package Number	Package Description
SCAN18540TSSC	MS54A	56-Lead Shrink Small Outline Package (SSOP), JEDEC MO-118, 0.300 Wide

### **Connection Diagram**



#### **Pin Descriptions**


Pin Names	Description
AI <sub>(0-8)</sub>	Input pins, A side
BI <sub>(0-8)</sub>	Input pins, B side
$\overline{AOE}_1$ , $\overline{AOE}_2$	3-STATE Output Enable Input pins, A side
$\overline{BOE}_1, \overline{BOE}_2$	3-STATE Output Enable Input pins, B side
AO <sub>(0-8)</sub>	Output pins, A side
BO <sub>(0-8)</sub>	Output pins, B side

#### **Truth Tables**

	Inputs		<del>_</del>
AOE <sub>1</sub>	AOE <sub>2</sub>	AI <sub>(0-8)</sub>	AO <sub>(0-8)</sub>
L	L	Н	L
Н	Х	X	Z
Х	Н	X	Z
L	L	L	Н

	Inputs		<del>DO</del>
BOE <sub>1</sub>	BOE <sub>2</sub>	BI <sub>(0-8)</sub>	BO <sub>(0-8)</sub>
L	L	Н	L
Н	Х	X	Z
X	Н	X	Z
L	L	L	Н

H = HIGH Voltage Level X = Immaterial
L = LOW Voltage Level Z = High Impedance

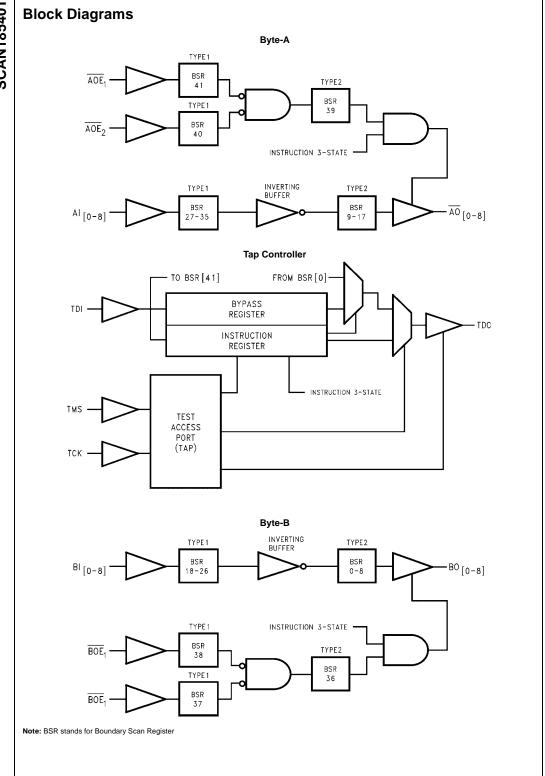

## **Description of BOUNDARY-SCAN Circuitry**

The scan cells used in the BOUNDARY-SCAN register are one of the following two types depending upon their location. Scan cell TYPE1 is intended to solely observe system data, while TYPE2 has the additional ability to control system data

Scan cell TYPE1 is located on each system input pin while scan cell TYPE2 is located at each system output pin as well as at each of the two internal active-high output enable signals. AOE controls the activity of the A-outputs while BOE controls the activity of the B-outputs. Each will activate their respective outputs by loading a logic high.


The BYPASS register is a single bit shift register stage identical to scan cell TYPE1. It captures a fixed logic low.

#### **Bypass Register Scan Chain Definition**





The INSTRUCTION register is an 8-bit register which captures the default value of 01001101. The two least significant bits of this captured value (01) are required by IEEE

Std 1149.1. The upper six bits are unique to the SCAN18540T device. SCAN CMOS Test Access Logic devices do not include the IEEE 1149.1 optional identification register. Therefore, this unique captured value can be used as a "pseudo ID" code to confirm that the correct device is placed in the appropriate location in the boundary scan chain.



Instruction Code	Instruction
00000000	EXTEST
10000001	SAMPLE/PRELOAD
10000010	CLAMP
00000011	HIGH-Z
All Others	BYPASS

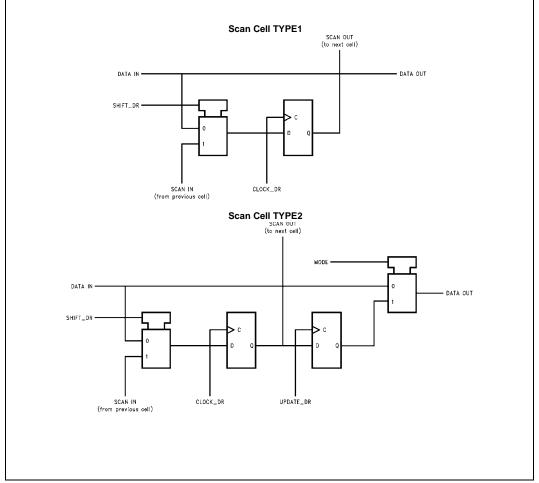

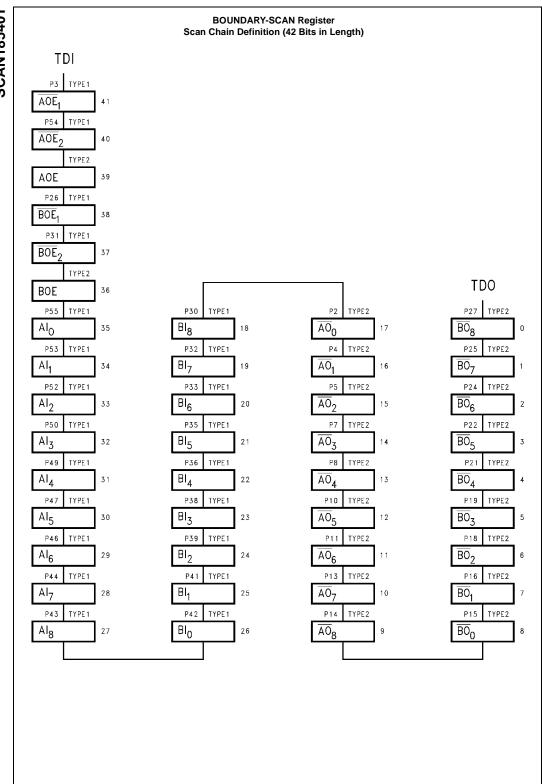

#### **BOUNDARY-SCAN Register Definition Index**

Bit No.	Pin Name	Pin No.	Pin Type	Scan C	ell Type
41	AOE <sub>1</sub>	3	Input	TYPE1	
40	AOE <sub>2</sub>	54	Input	TYPE1	
39	AOE		Internal	TYPE2	Control
38	BOE <sub>1</sub>	26	Input	TYPE1	Signals
37	BOE <sub>2</sub>	31	Input	TYPE1	
36	BOE		Internal	TYPE2	
35	AI <sub>0</sub>	55	Input	TYPE1	
34	AI <sub>1</sub>	53	Input	TYPE1	
33	Al <sub>2</sub>	52	Input	TYPE1	
32	Al <sub>3</sub>	50	Input	TYPE1	
31	Al <sub>4</sub>	49	Input	TYPE1	A–in
30	Al <sub>5</sub>	47	Input	TYPE1	
29	AI <sub>6</sub>	46	Input	TYPE1	
28	Al <sub>7</sub>	44	Input	TYPE1	
27	AI <sub>8</sub>	43	Input	TYPE1	
26	BI <sub>0</sub>	42	Input	TYPE1	
25	BI <sub>1</sub>	41	Input	TYPE1	
24	BI <sub>2</sub>	39	Input	TYPE1	
23	BI <sub>3</sub>	38	Input	TYPE1	
22	BI <sub>4</sub>	36	Input	TYPE1	B–in
21	BI <sub>5</sub>	35	Input	TYPE1	
20	BI <sub>6</sub>	33	Input	TYPE1	
19	BI <sub>7</sub>	32	Input	TYPE1	
18	BI <sub>8</sub>	30	Input	TYPE1	
17	AO <sub>0</sub>	2	Output	TYPE2	
16	AO <sub>1</sub>	4	Output	TYPE2	
15	AO <sub>2</sub>	5	Output	TYPE2	
14	AO <sub>3</sub>	7	Output	TYPE2	
13	AO <sub>4</sub>	8	Output	TYPE2	A-out
12	AO <sub>5</sub>	10	Output	TYPE2	
11	AO <sub>6</sub>	11	Output	TYPE2	
10	AO <sub>7</sub>	13	Output	TYPE2	
9	AO <sub>8</sub>	14	Output	TYPE2	
8	BO <sub>0</sub>	15	Output	TYPE2	
7	BO <sub>1</sub>	16	Output	TYPE2	
6	BO <sub>2</sub>	18	Output	TYPE2	
5	BO <sub>3</sub>	19	Output	TYPE2	
4	BO <sub>4</sub>	21	Output	TYPE2	B–in
3	BO <sub>5</sub>	22	Output	TYPE2	
2	BO <sub>6</sub>	24	Output	TYPE2	
1	BO <sub>7</sub>	25	Output	TYPE2	
0	BO <sub>8</sub>	27	Output	TYPE2	

## **Absolute Maximum Ratings**(Note 1)

-0.5V to +7.0V Supply Voltage (V<sub>CC</sub>)

DC Input Diode Current (I<sub>IK</sub>)

 $V_1 = -0.5V$ -20 mA  $V_I = V_{CC} + 0.5V$ +20 mA

DC Output Diode Current (I<sub>OK</sub>)

 $V_{O} = -0.5V$ -20 mA  $V_O = V_{CC} + 0.5V$ +20 mA DC Output Voltage (V<sub>O</sub>) -0.5V to  $V_{CC}$  +0.5V  $\pm 70 \text{ mA}$ 

DC Output Source/Sink Current (IO)

DC V<sub>CC</sub> or Ground Current

Per Output Pin  $\pm 70 \text{ mA}$ 

Junction Temperature

SSOP +140°C -65°C to +150°C Storage Temperature

ESD (Min) 2000V

## **Recommended Operating Conditions**

Supply Voltage ( $V_{CC}$ )

SCAN Products 4.5V to 5.5V 0V to  $V_{\mbox{\footnotesize CC}}$ Input Voltage (V<sub>I</sub>) 0V to  $V_{CC}$ Output Voltage (V<sub>O</sub>) -40°C to +85°C Operating Temperature (T<sub>A</sub>) Minimum Input Edge Rate  $\Delta V/\Delta t$ 125 mV/ns

 $V_{\mbox{\scriptsize IN}}$  from 0.8V to 2.0V

V<sub>CC</sub> @ 4.5V, 5.5V

Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation of SCAN circuits outside databook specifications.

#### **DC Electrical Characteristics**

Symbol	Donometer	$V_{CC}$ $T_A = +25^{\circ}C$		$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$	Units	Conditions	
Symbol	Parameter	(V)	(V) Typ Guaranteed Limits		aranteed Limits	Units	Conditions
/ <sub>IH</sub>	Minimum HIGH	4.5	1.5	2.0	2.0	V	V <sub>OUT</sub> = 0.1V
	Input Voltage	5.5	1.5	2.0	2.0	V	or V <sub>CC</sub> -0.1V
/ <sub>IL</sub>	Maximum LOW	4.5	1.5	0.8	0.8	V	V <sub>OUT</sub> = 0.1V
	Input Voltage	5.5	1.5	0.8	0.8	V	or V <sub>CC</sub> -0.1V
ОН	Minimum HIGH	4.5		3.15	3.15	.,	
	Output Voltage	5.5		4.15	4.15	V	$I_{OUT} = -50 \mu A$
	(Note 2)	4.5		2.4	2.4	V	$V_{IN} = V_{IL}$ or $V_{IH}$
		5.5		2.4	2.4	V	$I_{OH} = -32 \text{ mA}$
		4.5		2.4		V	$V_{IN} = V_{IL}$ or $V_{IH}$
		5.5		2.4		V	$I_{OH} = -24 \text{ mA}$
OL	Maximum LOW	4.5		0.1	0.1		
	Output Voltage	5.5		0.1	0.1	V	$I_{OUT} = 50 \mu A$
	(Note 2)	4.5		0.55	0.55		$V_{IN} = V_{IL}$ or $V_{IH}$
		5.5		0.55	0.55	V	I <sub>OL</sub> = 64 mA
		4.5		0.55			$V_{IN} = V_{IL}$ or $V_{IH}$
		5.5		0.55		V	I <sub>OL</sub> = 48 mA
N	Maximum Input						
	Leakage Current	5.5		±0.1	±1.0	μΑ	$V_I = V_{CC}$ , GND
v .	Maximum Input	5.5		2.8	3.6	μА	$V_I = V_{CC}$
DI, TMS	Leakage			-385	-385	μА	V <sub>I</sub> = GND
	Minimum Input						
	Leakage	5.5		-160	-160	μΑ	$V_I = GND$
OLD	Minimum Dynamic	5.5		94	94	mA	V <sub>OLD</sub> = 0.8V Max
OHD	Output Current (Note 3)			-40	-40	mA	V <sub>OHD</sub> = 2.0V Min
)Z	Maximum Output			10.5	15.0		V (OF) V V
	Leakage Current	5.5		±0.5	±5.0	μА	$V_{I}$ (OE) = $V_{IL}$ , $V_{IH}$
ıs	Output Short			400	400	ma A. M. dica	V 0V
	Circuit Current	5.5		-100	-100	mA Min	$V_O = 0V$
С	Maximum Quiescent			10.0	00		V <sub>O</sub> = Open
	Supply Current	5.5		16.0	88	μΑ	TDI, TMS = $V_{CC}$
		<i>E E</i>		750	920		V <sub>O</sub> = Open
		5.5		750	820	μΑ	TDI, TMS = GND

## DC Electrical Characteristics (Continued)

Symbol	Parameter	V <sub>CC</sub>	$T_A = +25^{\circ}C$		$T_A = -40^{\circ}C$ to $+85^{\circ}C$	Units	Conditions	
Cymbol	rarameter	(V)	Тур	Guaranteed Limits		Onits	Conditions	
I <sub>CCt</sub>	Maximum I <sub>CC</sub> Per Input	5.5		2.0	2.0	mA	$V_I = V_{CC}-2.1V$	
		5.5		2.15	2.15	mA	$V_I = V_{CC}$ –2.1V TDI/TMS Pin, Test One with the other Floating	

Note 2: All outputs loaded; thresholds associated with output under test.

Note 3: Maximum test duration 2.0 ms, one output loaded at a time.

## **Noise Specifications**

Symbol	Parameter	V <sub>cc</sub>	<b>T</b> <sub>A</sub> = -	+25°C	$T_A = -40^{\circ}C$ to $+85^{\circ}C$	Units
V <sub>OLV</sub> Mini	Falameter	(V)	Тур	Gua	ranteed Limits	Oilles
V <sub>OLP</sub>	Maximum HIGH Output Noise (Note 4)(Note 5)	5.0	1.0	1.5		V
V <sub>OLV</sub>	Minimum LOW Output Noise (Note 4)(Note 5)	5.0	-0.6	-1.2		V
V <sub>OHP</sub>	Maximum Overshoot (Note 5)(Note 6)	5.0	V <sub>OH</sub> +1.0	V <sub>OH</sub> +1.5		V
V <sub>OHV</sub>	Minimum V <sub>CC</sub> Droop (Note 6)(Note 5)	5.0	V <sub>OH</sub> -1.0	V <sub>OH</sub> -1.8		V
V <sub>IHD</sub>	Minimum HIGH Dynamic Input Voltage Level (Note 6)(Note 7)	5.5	1.6	2.0	2.0	٧
V <sub>ILD</sub>	Maximum LOW Dynamic Input Voltage Level (Note 6)(Note 7)	5.5	1.4	0.8	0.8	V

Note 4: Maximum number of outputs that can switch simultaneously is n. (n-1) outputs are switched LOW and one output held LOW.

Note 5: Maximum number of outputs that can switch simultaneously is n. (n-1) outputs are switched HIGH and one output held HIGH.

Note 6: Worst case package.

Note 7: Maximum number of data inputs (n) switching. (n-1) input switching 0V to 3V. Input under test switching 3V to threshold (V<sub>ILD</sub>).

#### **AC Electrical Characteristics**

Normal Operation:

Symbol	Parameter	V <sub>CC</sub> (V)		$T_A = +25$ °C $C_L = 50 \text{ pF}$			C to +85°C 50 pF	Units
		(Note 8)	Min	Тур	Max	Min	Max	
t <sub>PLH</sub> ,	Propagation Delay	5.0	2.5		9.0	2.5	9.8	
t <sub>PHL</sub>	Data to Q		2.5		9.0	2.5	9.8	ns
t <sub>PLZ</sub> ,	Disable Time	5.0	1.5		10.2	1.5	10.7	20
t <sub>PHZ</sub>			1.5		10.2	1.5	10.7	ns
t <sub>PZL</sub> ,	Enable Time	5.0	2.0		11.8	2.0	12.8	ns
t <sub>PZH</sub>			2.0		9.5	2.0	10.5	115

Note 8: Voltage Range 5.0 is 5.0V  $\pm$  0.5V.

 $\textbf{Note:} \ \textbf{All Input Timing Delays involving TCK are measured from the rising edge of TCK.}$ 

# **AC Electrical Characteristics**

Scan Test Operation:

		V <sub>CC</sub>		T <sub>A</sub> = +25°C		T <sub>A</sub> = -40°0	C to +85°C	
Symbol	Parameter	(V)		$C_L = 50 pF$		<b>C</b> <sub>L</sub> = 3	Units	
		(Note 9)	Min	Тур	Max	Min	Max	
PLH,	Propagation Delay	5.0	3.5		13.2	3.5	14.5	
t <sub>PHL</sub>	TCK to TDO		3.5		13.2	3.5	14.5	ns
PLZ,	Disable Time	5.0	2.5		11.5	2.5	11.9	
t <sub>PHZ</sub>	TCK to TDO		2.5		11.5	2.5	11.9	ns
t <sub>PZL</sub> ,	Enable Time	5.0	3.0		14.5	3.0	15.8	
t <sub>PZH</sub>	TCK to TDO		3.0		14.5	3.0	15.8	ns
t <sub>PLH</sub> ,	Propagation Delay							
t <sub>PHL</sub>	TCK to Data Out	5.0	5.0		18.0	5.0	19.8	ns
	During Update-		5.0		18.0	5.0	19.8	
	-DR State							
t <sub>PLH</sub> ,	Propagation Delay							
t <sub>PHL</sub>	TCK to Data Out	5.0	5.0		18.6	5.0	20.2	ns
	During Update-		5.0		18.6	5.0	20.2	
	IR State							
t <sub>PLH</sub> ,	Propagation Delay							
PHL	TCK to Data Out	5.0	5.5		19.9	5.5	21.5	ns
	During Test Logic		5.5		19.9	5.5	21.5	
	Reset State							
t <sub>PLZ</sub> ,	Propagation Delay							
t <sub>PHZ</sub>	TCK to Data Out	5.0	4.0		16.4	4.0	18.2	ns
	During Update-		4.0		16.4	4.0	18.2	
	DR State							
t <sub>PLZ</sub> ,	Propagation Delay							
t <sub>PHZ</sub>	TCK to Data Out	5.0	5.0		19.5	5.0	20.8	ns
	During Update-		5.0		19.5	5.0	20.8	
	IR State							
t <sub>PLZ</sub> ,	Propagation Delay							
PHZ	TCK to Data Out	5.0	5.0		19.9	5.0	21.5	ns
	During Test Logic		5.0		19.9	5.0	21.5	
	Reset State							
t <sub>PZL</sub> ,	Propagation Delay							
t <sub>PZH</sub>	TCK to Data Out	5.0	5.0		18.9	5.0	20.9	ns
	During Update-	0.0	5.0		18.9	5.0	20.9	
	DR State							
t <sub>PZL</sub> ,	Propagation Delay							
t <sub>PZH</sub>	TCK to Data Out	5.0	6.5		22.4	6.5	24.2	ns
	During Update-		6.5		22.4	6.5	24.2	
	IR State							
t <sub>PZL</sub> ,	Propagation Delay							
t <sub>PZH</sub>	TCK to Data Out	5.0	7.0		23.8	7.0	25.7	ns
	During Test Logic		7.0		23.8	7.0	25.7	
	Reset State							

Note 9: Voltage Range 5.0 is  $5.0V \pm 0.5V$ .

Note: All Input Timing Delays involving TCK are measured from the rising edge of TCK.

## **AC Operating Requirements**

		v <sub>cc</sub>	$T_A = +25^{\circ}C$	$T_A = -40^{\circ}C$ to $+85^{\circ}C$		
Symbol	Parameter	(V)	$C_L = 50 \text{ pF}$	$C_L = 50 pF$	Units	
		(Note 10)	Guarantee	d Minimum	1	
t <sub>S</sub>	Setup Time, H or L	5.0	3.0	3.0		
	Data to TCK (Note 11)	5.0	3.0	3.0	ns	
t <sub>H</sub>	Hold Time, H or L	5.0	4.5	4.5	no	
	TCK to Data (Note 11)	5.0	4.5	4.5	ns	
t <sub>S</sub>	Setup Time, H or L					
	$\overline{AOE}_n$ , $\overline{BOE}_n$	5.0	3.0	3.0	ns	
	to TCK (Note 12)					
t <sub>H</sub>	Hold Time, H or L					
	TCK to $\overline{AOE}_n$ ,	5.0	4.5	4.5	ns	
	BOE <sub>n</sub> (Note 12)					
t <sub>S</sub>	Setup Time, H or L					
	Internal AOE, BOE,	5.0	3.0	3.0	ns	
	to TCK (Note 13)					
t <sub>H</sub>	Hold Time, H or L					
	TCK to Internal	5.0	3.0	3.0	ns	
	AOE, BOE (Note 13)					
t <sub>S</sub>	Setup Time, H or L	5.0	8.0	8.0	ns	
	TMS to TCK	3.0	0.0	0.0	113	
t <sub>H</sub>	Hold Time, H or L	5.0	2.0	2.0	ns	
	TCK to TMS	5.0	2.0	2.0	115	
t <sub>S</sub>	Setup Time, H or L	5.0	4.0	4.0	ns	
	TDI to TCK	3.0	4.0	4.0	115	
t <sub>H</sub>	Hold Time, H or L	5.0	4.5	4.5	ns	
	TCK to TDI	3.0	4.5	4.5	113	
t <sub>W</sub>	Pulse Width TCK	5.0				
	н		15.0	15.0	ns	
	L		5.0	5.0		
f <sub>MAX</sub>	Maximum TCK	5.0	25	25	MHz	
	Clock Frequency	5.0	20	23	IVII7Z	
T <sub>PU</sub>	Wait Time,	5.0	100	100	ns	
	Power Up to TCK	5.0	100	100	115	
T <sub>DN</sub>	Power Down Delay	0.0	100	100	ms	

Note 10: Voltage Range 5.0 is  $5.0V \pm 0.5V$ .

Note 11: This delay represents the timing relationship between the data input and TCK at the associated scan cells numbered 0-8, 9-17, 18-26, and 27-35.

Note 12: Timing pertains to BSR 37, 38, 40 and 41.

Note 13: This delay represents the timing relationship between AOE/BOE and TCK for scan cells 36 and 39 only.

Note: All Input Timing Delays involving TCK are measured from the rising edge of TCK.

#### **Extended AC Electrical Characteristics**

Symbol	Parameter	$T_A = 25^{\circ}C$ $V_{CC} = 5.0V$ $C_L = 50 \text{ pF}$ 18 Outputs Switching (Note 14)			$T_A = -40^{\circ}\text{C to} + 85^{\circ}\text{C}$ $V_{CC} = 5.0\text{V } \pm 0.5\text{V}$ $C_L = 250 \text{ pF}$ (Note 15)		Units
		Min	Тур	Max	Min	Max	1
t <sub>PLH</sub> ,	Propagation Delay	3.0		11.0	4.0	13.0	ns
t <sub>PHL</sub>	Data to Output	3.0		11.0	4.0	15.0	115
t <sub>PZH</sub> ,	Output Enable Time	2.5		11.5	(Note 16)		ns
t <sub>PZL</sub>		2.5		14.0			
t <sub>PHZ</sub> ,	Output Disable Time	2.0		11.5	(Note 17)		ns
t <sub>PLZ</sub>		2.0		11.5			
toshl	Pin to Pin Skew		0.5	1.0		1.0	
(Note 18)	HL Data to Output		0.5 1.0		1.0	ns	
t <sub>OSLH</sub> (Note 18)	Pin to Pin Skew LH Data to Output		0.5	1.0		1.0	ns

Note 14: This specification is guaranteed but not tested. The limits apply to propagation delays for all paths described switching in phase (i.e., all LOW-to-HIGH, HIGH-to-LOW etc.).

Note 15: This specification is guaranteed but not tested. The limits represent propagation delays with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load. This specification pertains to single output switching only.


Note 16: 3-STATE delays are load dominated and have been excluded from the datasheet.

Note 17: The Output Disable Time is dominated by the RC network  $(500\Omega, 250 \text{ pF})$  on the output and has been excluded from the datasheet.

Note 18: Skew is defined as the absolute value of the difference between the actual propagation delays for any two separate outputs of the same device. The specification applies to any outputs switching HIGH-to-LOW (toSHL), LOW-to-HIGH (toSLH), or any combination LOW-to-HIGH and/or HIGH-to-LOW.

## Capacitance

Symbol	Parameter	Тур	Units	Conditions
C <sub>IN</sub>	Input Pin Capacitance	4.0	pF	V <sub>CC</sub> = 5.0V
C <sub>OUT</sub>	Output Pin Capacitance	13.0	pF	V <sub>CC</sub> = 5.0V
C <sub>PD</sub>	Power Dissipation Capacitance	34.0	pF	$V_{CC} = 5.0V$

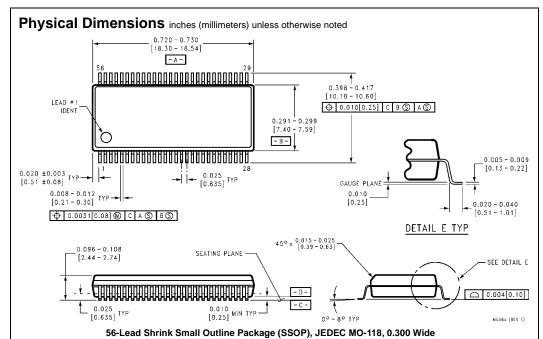

Package Number MS56A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com