SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA 22.2, # 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 3 AMP, 120/250 VAC,

3 AMP/40°C, 250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.22 mA@ 120V 60Hz 0.38 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, T₀, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I₀, IS AS FOLLOWS: I₀ = I₀ $\sqrt{85}$ -T₀

 $I_0 = I_r -$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDS

CATALOG # 3EJS1 ECN # APPRVD. DATE 08-012313 PJD 19MAY08

CUSTOMER DRAWING

TEST SPECIFICATIONS:

INDUCTANCE: 1.45 mH NDMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0059 μF ±20% 0.1015 μF ±20% LINE TO LINE: 1.5M △

DISCHARGE RESISTOR: L/G AND L/L I.R.

ND DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,

20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC OR 2250 VDC FOR 1 MINUTE

LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

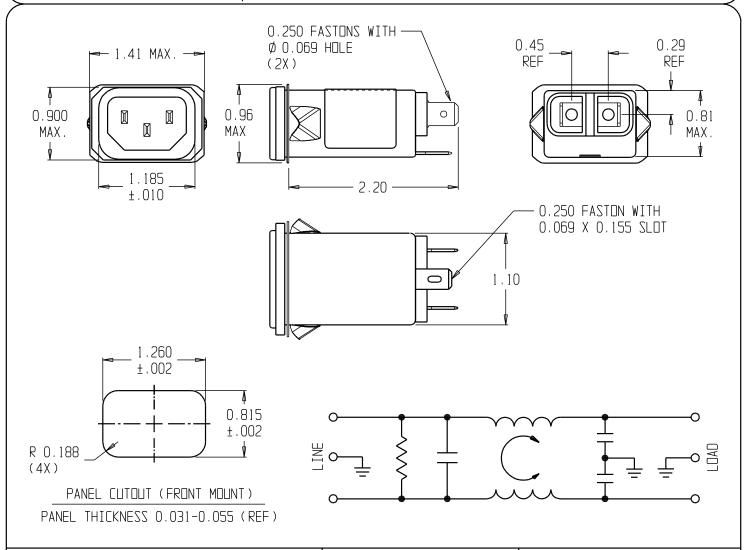

50~- 50~(MINIMUM) INSERTION LOSS										22	THIRD ANGLE	
FREQUENCY MHz	.01	. 05	0.1	. 15	0.5	1	5	10	30		PROJECTION UNLESS OTHERWISE SPECIFIED,	Tyco Electronics CORCOM PRODUCTS, 620 S. BUTTERFIELD RD. MANDELEIN IL 60060
		10	,,	20	70	70	40	50			TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED	POWER LINE FILTER
dB	_	10	15	20	30	39	48	50	60		THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO	TYCO ELECTRONICS PART ND. 0-6609006-8 SCALE: DATE: CATALOG NO. REV.
DIFF. dB	_	_	5	8	17	20	39	42	40		TYCO ELECTRONICS CORPORATION AND ITS WORLDVIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYMOE DIFFER THAT TYCO ELECTRONICS PERSONEL, MITHOUT WRITTEN AUTHORIZATION PROM TYCO ELECTRONICS CORPORATION. HARRISBURG, PENNSYLVANIA USA	DRW. BY: ORIG: PJD 3EJS1 4